



2024 Global Threat Report




Open

IOP Conference Series: Earth and Environmental Science

COUNTRY	SUBJECT AREA AND CATEGORY	PUBLISHER	H-INDEX
United Kingdom 	Earth and Planetary Sciences └ Earth and Planetary Sciences (miscellaneous) Environmental Science └ Environmental Science (miscellaneous) Physics and Astronomy └ Physics and Astronomy (miscellaneous)	IOP Publishing Ltd.	48
PUBLICATION TYPE	ISSN	COVERAGE	INFORMATION
Conferences and Proceedings	17551307, 17551315	2010-2023	Homepage How to publish in this journal ees@ioppublishing.org

SCOPE

The open access IOP Conference Series: Earth and Environmental Science (EES) provides a fast, versatile and cost-effective proceedings publication service.

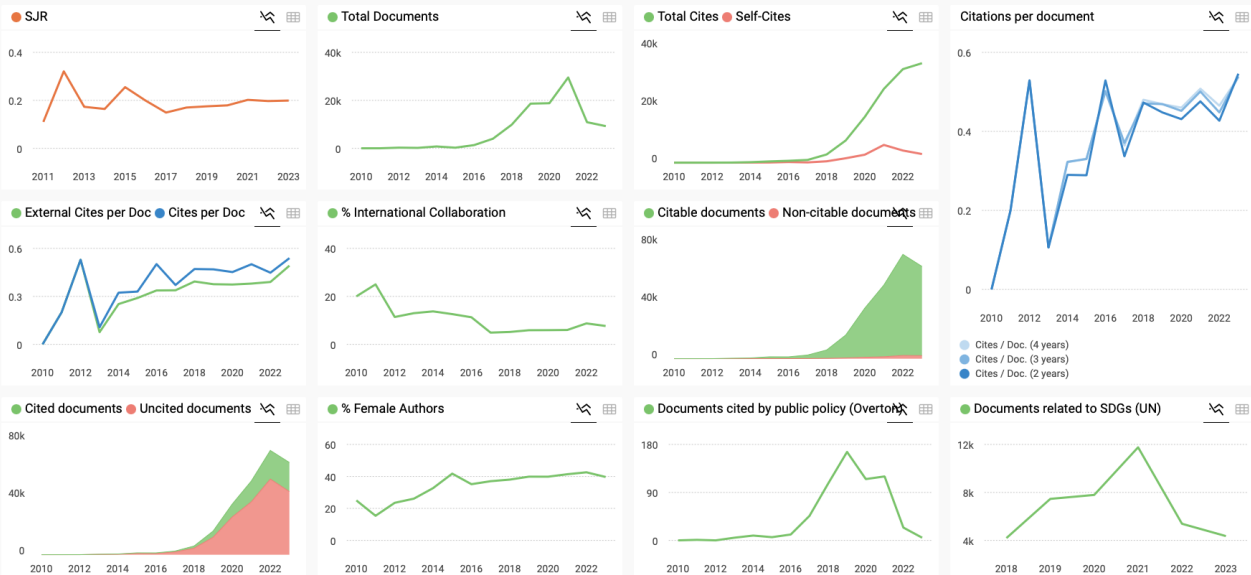

IOP Conference Series:
Earth and Environmental...

Not yet assigned
quartile

SJR 2023
0.2

powered by scimagojr.com

← Show this widget in
your own website

Just copy the code
below and paste
within your html code:
`<a href="https://w`

SCImago Graphica

Explore, visually
communicate and make
sense of data with our
[new data visualization
tool](#).



PAPER • OPEN ACCESS

Preface

To cite this article: 2023 *IOP Conf. Ser.: Earth Environ. Sci.* **1239** 011001

View the [article online](#) for updates and enhancements.

You may also like

- [The lateral distribution of electrons in extensive air showers](#)
D J van der Walt
- [Evidence for the behaviour of the photoproduction cross section at ultra-high energies](#)
D Dumora, J Procureur and J N Stamenov
- [Hadron interactions in cosmic rays at energies above the accelerator range](#)
S I Nikol'ski

PRIME
PACIFIC RIM MEETING
ON ELECTROCHEMICAL
AND SOLID STATE SCIENCE

HONOLULU, HI
Oct 6-11, 2024

Abstract submission deadline:
April 12, 2024

Learn more and submit!

Joint Meeting of

The Electrochemical Society
•
The Electrochemical Society of Japan
•
Korea Electrochemical Society

Preface

The International Conference Research Collaboration 2023 (ICRC) aimed to promote cooperation and collaboration between The University of Kitakyushu and other universities, specifically in Indonesia and Malaysia. This conference marked the third event in a series, with the first held at Airlangga University on March 5, 2018, and the second conducted online on April 25-27, 2021. During the conference, the consortium presented and published the research findings of 147 articles in the areas of environmental management, education, and technology. Moreover, it provided an opportunity for The University of Kitakyushu to engage with community members and academics interested in research within these fields.

ICRC 2023 extended an invitation to scholars and researchers to actively participate and contribute their knowledge and experiences to promote understanding and progress in environmental and sustainability matters within their respective countries. The conference provided a hybrid format, allowing participants to choose between attending in person or joining online. It aimed to foster innovation and exploration within the overarching theme of "Development of Science and Technology for Solving Environmental Problems." The conference focused on several specific subtopics, which include:

1. Water and Wastewater Treatment and Recycling
2. Environmental Education
3. Energy Management and Air Pollution Control
4. Environmental Culture and Conservation
5. Environmental Health and Sciences
6. Waste Management and Treatment
7. Soil and Urban Environment

This year, The University of Kitakyushu, Japan, hosted the third ICRC from June 2-3, 2023, featuring a hybrid conference format, followed by a workshop and training session in Kitakyushu, Japan, from June 4-6, 2023. There were 46 participants joining the on-site conference during the first and second day while the rest, around 265 participants from 78 universities and institutions around the world joining the conference virtually. Almost all the plenary speakers were attending the virtual session on the first day, while half of the invited speakers, which also coming from the Japanese industries and practitioners were joining onsite. Zoom was used as the meeting platform for the online participants.

We have chosen 40 excellent manuscripts to be published in the Earth and Environmental Science IOP Proceedings. We would like to extend our sincere appreciation to the conference chairwoman, esteemed keynote speaker, reviewers, parallel session moderators, and all the participants. We would also like to express our gratitude to IOP for publishing our conference proceedings. It is our hope that readers will find valuable information and knowledge within our proceedings. We apologize for any errors identified during the conference or within the published papers.

Scientific Steering Committee of ICRC 2023



ORGANIZING COMMITTEE

- Indriyani Rachman, Ph.D. (The University of Kitakyushu, Japan)
- Prof. Dr. Muhammad Ali, M.A. (Universitas Pendidikan Indonesia, Indonesia)
- Prof. Dr. H. Bibin Rubini, M.Pd (Universitas Pakuan, Indonesia)
- Prof. Kodama Yayoi (The University of Kitakyushu, Japan)
- Ir. Dr. Rini Setiati, M.T. (Universitas Trisakti, Indonesia)
- Dr. Eng. Slamet Raharjo (Universitas Andalas, Indonesia)
- Dr. Yuni Rahmawati, S.T., M.T. (Universitas Negeri Malang, Indonesia)
- Dr. Yonik Meilawati Yustiani, S.T., M.T.
(Universitas Pasundan, Indonesia)
- Nita Citrasari, S.T., M.T. (Universitas Airlangga, Indonesia)
- Annisa Sila Puspita, S.T., M.T. (Universitas Diponegoro, Indonesia)
- Muhammad Maarij Harfadli, S.T., M.T. (Institut Teknologi Kalimantan, Indonesia)
- Machmuddin Fitra Miftahadi, S.T. (The University of Kitakyushu, Japan)

SCIENTIFIC COMMITTEE

- Prof. Toru Matsumoto (The University of Kitakyushu, Japan)
- Assoc. Prof. Dr. Norlidah Alias (University of Malaya, Malaysia)
- Dr. Eng. Siti Sendari (Universitas Negeri Malang, Indonesia)
- Dr. Eng. Hafizhul Khair (Universitas Sumatera Utara, Indonesia)
- Dr. Benno Rahardyan, S.T., M.T. (Institut Teknologi Bandung, Indonesia)
- Dr. Dikpride Despa, M.T. (Universitas Lampung, Indonesia)
- Prof. Dr. Anna Permanasari, M.Si (Universitas Pakuan, Indonesia)
- Prof. Dr. Ir. Astri Rinanti, M.T. (Universitas Trisakti, Indonesia)
- Dr. Tengku Kemala Intan, M.Pd., M. Biomed (Universitas Sumatera Utara, Indonesia)
- Teddy Tedjakusuma, S.T, M.T, Ph.D. (Institut Teknologi Bandung, Indonesia)
- Bimastyaji Surya Ramadan, S.T., M.T. (Universitas Diponegoro, Indonesia)

PAPER • **OPEN ACCESS**

Peer Review Statement

To cite this article: 2023 *IOP Conf. Ser.: Earth Environ. Sci.* **1239** 011002

View the [article online](#) for updates and enhancements.

You may also like

- [Peer Review Statement](#)
- [Peer Review Statement](#)
- [Peer Review Statement](#)



PRIME
PACIFIC RIM MEETING
ON ELECTROCHEMICAL
AND SOLID STATE SCIENCE

HONOLULU, HI
Oct 6–11, 2024

Abstract submission deadline:
April 12, 2024

Learn more and submit!

Joint Meeting of

The Electrochemical Society
•
The Electrochemical Society of Japan
•
Korea Electrochemical Society

Peer Review Statement

All papers published in this volume have been reviewed through processes administered by the Editors. Reviews were conducted by expert referees to the professional and scientific standards expected of a proceedings journal published by IOP Publishing.

- **Type of peer review:** Double Anonymous
- **Conference submission management system:** Morressier
- **Number of submissions received:** 118
- **Number of submissions sent for review:** 101
- **Number of submissions accepted:** 40
- **Acceptance Rate (Submissions Accepted / Submissions Received × 100):** 33.9
- **Average number of reviews per paper:** 2
- **Total number of reviewers involved:** 23
- **Contact person for queries:**
Name: Bimastyaji Surya Ramadan
Email: bimastyaji@live.undip.ac.id
Affiliation: Universitas Diponegoro



PAPER • OPEN ACCESS

Bioremediation of diesel oil: potential use of bacteria consortium *Lactobacillus fermentum* and *Clostridium beijerinckii* in degrading Total Petroleum Hydrocarbon (TPH)

To cite this article: Naomi Oshin Laurensa Sipahutar *et al* 2023 *IOP Conf. Ser.: Earth Environ. Sci.* **1239** 012037

View the [article online](#) for updates and enhancements.

You may also like

- [The Effect of *Beijerinckia fluminensis* G3 and *Rhizobium pusense* G4c on Germination of rice Var. Ciherang and red rice Var. Barak Cenana](#)
Johan Sukweenadhi, Kevin Sutanto, Ida Bagus Made Artadana et al.
- [Optical control of collision dynamics in a metastable neon magneto-optical trap](#)
R D Glover, J E Calvert, D E Laban et al.
- [Longitudinal alignment transfer between fine-structure levels in Ne \(2p⁵3p\) + He collisions. Comparison between cell experiments and quantum calculations](#)
Cristian Bahrim, Dominique Hennecart, H  l  ne Kucal et al.



PRIME
PACIFIC RIM MEETING
ON ELECTROCHEMICAL
AND SOLID STATE SCIENCE

HONOLULU, HI
Oct 6–11, 2024

Abstract submission deadline:
April 12, 2024

Learn more and submit!



Joint Meeting of

The Electrochemical Society
•
The Electrochemical Society of Japan
•
Korea Electrochemical Society

Bioremediation of diesel oil: potential use of bacteria consortium *Lactobacillus fermentum* and *Clostridium beijerinckii* in degrading Total Petroleum Hydrocarbon (TPH)

Naomi Oshin Laurensa Sipahutar, *Lutfia Rahmiyati, Astri Rinanti, Melati Ferianita Fachrul, Astari Minarti

Environmental Engineering Department, Faculty of Landscape Architecture and Environmental Technology, Universitas Trisakti, Jakarta, Indonesia

*)lutfiarahmiyati@trisakti.ac.id

Abstract. Diesel oil is a major petroleum-refined product known as the primary environmental pollutant due to its toxic complex hydrocarbons and difficulty in decomposing naturally. This study aims to determine the efficiency of TPH (Total Petroleum Hydrocarbon) removal in the bioremediation process of diesel oil pollution by utilizing a bacteria consortium of *Lactobacillus fermentum* and *Clostridium beijerinckii* as biocatalysts. The diesel oil degradation test was conducted on a laboratory scale using Stone Mineral Salt Solution (SMSs) liquid media with a batch system (limited culture). The temperature was set at 30°C with a rotation speed of 150 rpm for 10 days. Different treatments of pH (5, 7, 9) and contact time (10, 20, 30 days) were applied to varied diesel oil concentrations (5, 10, 20%, v/v). The oil components were measured using Gas Chromatography-Flame Ionization Detector. Diesel oil samples were put into SMSs containing 10% bacterial consortium and 10% NPK fertilizer. The sensitivity test showed that the bacterial consortium was resistant, proven by the absence of an inhibition zone around the disc paper area containing diesel oil. The highest TPH removal efficiency found was 97.3% when 5% diesel oil was degraded by the bacterial consortium at pH 7 for 20 days. This study proves that the bacterial consortium can be recommended in bioremediation to alleviate diesel oil pollution in the environment.

Keywords: Diesel oil; Bioremediation; Total Petroleum Hydrocarbon (TPH); *Lactobacillus fermentum*; *Clostridium beijerinckii*

1. Introduction

Environmental pollution by petroleum and petroleum-related compounds, especially diesel oil, increases yearly. Diesel oil pollution is an ecological disaster affecting human social life and has biohazard effects on the surrounding environment [1]. Diesel oil is an engine fuel that contains hydrocarbons with C chains ranging from C8-C26 and polyaromatic hydrocarbons (PAHs) [2]. Diesel oil is a marine water and soil pollutant [3]. Soil contaminated with diesel oil spills affects the soil's ecological environment, impacting human activities. The environment affected by spills or contamination derived from diesel oil will experience changes in physical composition and chemical composition that affect the soil's texture and composition, thereby reducing soil porosity [4-5]. About 1.7 to 8.8 million metric tonnes of hydrocarbons, including diesel oil, are reported to pollute land and marine areas annually [6]. The pollution problem by diesel oil can be addressed in several ways, including using physical-chemical methods (e.g., in situ burning, adsorption, chemical dispersants, soil washing, and sorbents) and



biological methods. The current waste management technology for this problem is the bioremediation method [7]. Bioremediation is a detoxification method that aims to reduce pollution levels in recovering the environment affected by oil contamination [8-11]. In the petroleum bioremediation process, the use of bacterial consortium can affect the degradation process because each type of bacteria requires a specific substrate to degrade the petroleum components [12-14]. Some bacteria isolated from diesel oil-contaminated areas, e.g., *Lactobacillus* sp., *Acinetobacter* sp., *Vibrio* sp., *Moraxella* sp., and *Clostridium* sp., can reduce the content of diesel oil [15-18]. This study aims to determine the growth response of *Lactobacillus fermentum* and *Clostridium beijerinckii* bacterial consortium in environmental conditions polluted with diesel oil. The optimum condition will be tested using variations in pH and contact time that obtain the highest TPH (Total Petroleum Hydrocarbon) removal efficiency during the petroleum degradation process.

2. Materials and Methods

2.1. Diesel Oil Characterisation

The petroleum samples used were tested at the Lemigas ESDM Laboratory, Jakarta, using the gravimetric method to test Total Petroleum Hydrocarbon (TPH) concentration and Gas Chromatography-Flame Ionisation Detector (GC-FID).

2.2. Bacterial Cultivation and Growth Analysis

The bacterial consortium used in this study was *Lactobacillus fermentum* and *Clostridium beijerinckii*. They were cultivated in SMSs (Stone Mineral Salt Solution) growth media, a liquid media containing minerals and salts, i.e., 1 g Na₂HPO₄·7H₂O, 2.5 g NH₄NO₃, 0.5 g CaCO₃, 0.5 g MgSO₄·7H₂O, 0.2 g MnCl₂·7H₂O, and 0.5 g KH₂PO₄. The minerals and salts were dissolved in 1 liter of distilled water and then sterilized using an autoclave at 121°C for 30 minutes. The bacterial consortium act as a biocatalyst and was cultivated for 120 hours at 30°C using a shaker incubator with a rotational speed of 150 rpm. During cultivation, the bacterial consortium was given additional nitrogen source nutrients of 5% liquid NPK fertilizer. Growth curves were made using Total Plate Count (TPC) by counting the number of cells every 24 hours for 240 hours. Similarly, the ability of bacteria to reduce the levels of diesel oil compounds was indicated by the number of living bacteria from the beginning to the end of the study, which was calculated using the TPC method.

2.3. Sensitivity Test of Bacterial Consortium *L. fermentum* dan *C. beijerinckii* on Diesel Oil

The sensitivity test was performed to test the sensitivity or susceptibility of the bacterial consortium to the pollutant load, i.e., diesel oil. The bacterial consortium was placed in a petri dish containing liquid NA, then allowed to solidify. Paper discs exposed to diesel oil were placed on the solid NA and were incubated for 48 hours at 37°C.

2.4. Diesel Oil Degradation Test in SMSs Liquid Media

The diesel oil degradation test was done stepwise in a batch system with SMSs liquid media to find the optimum conditions for each parameter tested. The variations of each parameter were acidity value (pH) with variations of 5, 7, 9; contact time with variations of 10, 20, 30 days; and diesel oil concentration with variations of 5, 10, 20 % v/v. The composition used for pH and contact time optimization was 70% SMSs media (v/v), 10% NPK fertilizer (v/v), 10% bacterial consortium (v/v), and 10% diesel oil (v/v). Samples were replicated twice, and each replicate was incubated at 30°C using a shaker incubator with a rotational speed of 150 rpm. Each sample was tested by Lemigas ESDM Laboratory, Jakarta, to obtain Total Petroleum Hydrocarbon (TPH) levels. The lowest final TPH level from the variable results of pH, contact time, and diesel oil concentration will determine the optimum performance conditions of the bacterial consortium in degrading the TPH content in diesel oil. The formula used to calculate the TPH removal efficiency is as follows:

$$\% \text{ TPH Degradation} = 100\% \times \frac{B - A}{B}$$

B is the initial TPH concentration before the degradation test (%), and A is the final TPH concentration after degradation (%).

3. Result and Discussion

The results of diesel oil characterization from the Lemigas ESDM Laboratory, Jakarta, show results that can be seen in the gas chromatography - flame ionization detector (GC-FID) analysis in Figure 1 and are classified based on specific gravity or API gravity were classified by specific gravity or API gravity (Table 1).

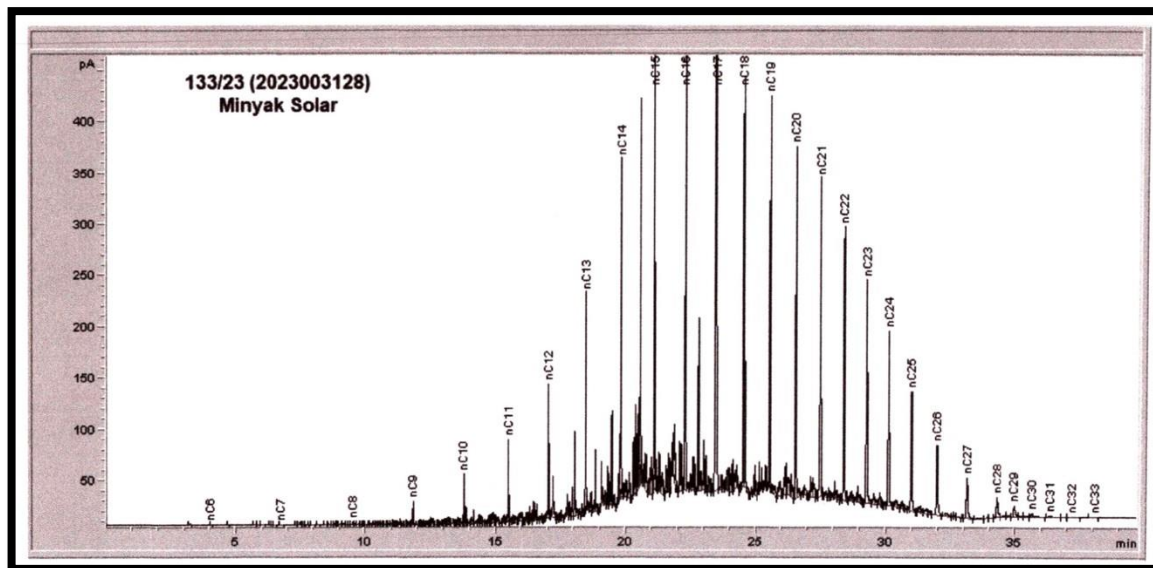


Figure 1. Initial Concentration of Diesel Oil

Based on Figure 1, that diesel oil has a chain of C15-C19 carbon atoms which can be seen from the peaks on the graph. It can also be seen from the graph that diesel oil is derived from the number of C33 carbon atoms which may have a low molecular weight that appears at the initial mooring time and is thought to be an isomer of branched alkanes. The mechanism for the formation of these compounds could not be explained in this study.

Table 1. Diesel Oil Samples Characteristics.

Parameters	Unit	Value	Methods
Density at 15°C	Kg/m ³	855,6	ASTM D 4052
API	-	33,8	ASTM D 4052
Spesific Gravity at 60/60 °F	-	0.8560	ASTM D 4052
TPH	%	87,27	Gravimetry

The specific gravity and API values based on preliminary characterization tests were 0.8610 and 32.85. These characteristics indicate that the diesel oil sample is a medium oil with a range of 31°-58° [19]. Total Petroleum Hydrocarbon (TPH) showed a value of 99.47%. The initial diesel oil characterization results were used as a reference for the initial TPH concentration before the bacterial consortium removed diesel oil TPH.

The growth of bacterial consortium *L. fermentum* and *C. beijerinckii* in SMSS media with and without the addition of diesel oil as a contaminant can be seen in Figure 2. The growth of the bacterial consortium without contaminants lasted for 240 hours. During cultivation, there were 3 growth phases: exponential, stationary, and death. Cultivation of bacteria without petroleum on SMSs media showed an exponential

phase that lasted from 0 hours to 144 hours. In this phase, the bacterial consortium began to adapt to the growth media and experienced a rapid increase in cell number. The bacterial consortium entered the stationary phase after 144 to 168 hours, characterized by a constant growth in the number of bacterial cells. After 168 hours, the death phase occurs, characterized by a decrease in the number of bacteria because the nutrients in the growth medium have begun to decrease; hence, bacterial cell metabolism also decreases.

Cultivation of bacterial consortium on SMSs media containing petroleum showed an exponential phase from 0 to 120 hours. The stationary phase occurs after 120 to 168 hours, indicated by the constant growth of the bacteria. The bacterial consortium began to enter the death phase with a decrease in the number of cells after 168 hours.

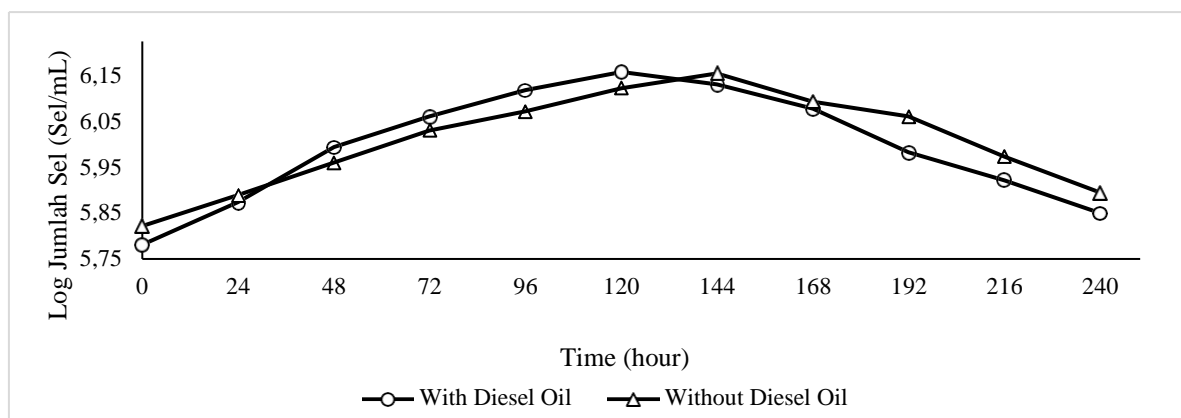


Figure 2. The Growth of Bacterial Consortium in SMSS Media With and Without Diesel Oil

The bacterial consortium added with diesel oil enters the exponential phase faster than bacterial cultivation in SMSs media without contaminants (Figure 2). The exponential phase starts at hours 72 to 120. A rapid increase in the number of bacteria characterizes the exponential phase. It seems that the bacterial consortium of *L. fermentum* and *C. beijerinckii* could utilize the carbon element in petroleum as a nutrient source for cell metabolic activities, so bacterial cells divide faster. After hour 120, the bacteria entered the stationary phase until hour 168, characterized by a constant bacterial growth rate so that the number of bacterial cells decreased slightly. The availability of macronutrients and micronutrients that are complete, appropriate, and with the proper ratio is crucial to support bacterial growth. Bacterial cells' main constituents are carbon, oxygen, hydrogen, and nitrogen. These elements, primarily carbon, are crucial substrates to produce energy in bacteria so bacterial metabolism can occur properly [20-21].

Figure 3 shows the results of the sensitivity test of *L. fermentum* and *C. beijerinckii* bacteria to petroleum, where no inhibition zone formed around the disc paper containing petroleum. This result indicates that both bacteria are resistant or insensitive to petroleum and can grow in environments or media containing petroleum. Based on these results, the bacterial consortium showed the ability to degrade the TPH content in petroleum.



Figure 3. Result of Sensitivity Test of *L. fermentum* and *C. beijerinckii* Exposed to Diesel Oil (a) hour 0; (b) hour 24; and (c) hour 48

The resistant nature of *C. beijerinckii* to petroleum was shown by its ability to utilize hydrocarbons and cut long C chains to produce shorter C atoms [22]. Meanwhile, the resistant nature of *L. fermentum* to petroleum is shown by its ability to bind and detoxify xenobiotic compounds [23-26].

The degradation process lasted 10 days with pH variations of 5, 7, and 9 (Table 2). The lowest removal efficiency (94.87%) occurred in treatment with pH 5, while the highest removal efficiency (95.77%) occurred at pH 7. Based on these results, the optimum pH for the degradation process of diesel oil TPH by a consortium of bacteria *L. fermentum* and *C. beijerinckii* occurred at pH 7. This result is supported by [27], who mentioned that bacteria used for biodegradation generally occur at neutral pH.

Table 2. Degradation of Diesel Oil TPH with Varying pH in SMSs Liquid Media

pH variation	Initial TPH	Final TPH	Removal efficiency (%)
	concentration (%; w/w)	Concentration (%; w/w)	
5	87.27	5.10	94.16%
7	87.27	8.18	90.63%
9	87.27	7.98	90.86%
Kontrol	87.27	1.85	97.88%

All pH variations resulted in a removal efficiency higher than 94% (Table 2). A pH value of 8-9.5 can cause microorganisms to die. Bacteria can grow and develop well in neutral pH conditions. Therefore, pH will affect the rate of biodegradation reactions influenced by changes in the ion structure on the active side of the bacterial enzyme work. The acidic pH value can be adjusted to neutral with the addition of lime to increase the decomposition or degradation of diesel oil twice. This pH adjustment can change the solubility, bioavailability, form of chemical compounds, and macro and micronutrients.

At t_0 , the initial TPH concentration was 87.27% (w/w), while on days 10, 20, and 30, the TPH concentration dropped to 5.1% (w/w), 6.1% (w/w) and 7.2% (w/w) respectively (Figure 4). TPH removal increased with increasing contact time until day 20 and no additional removal until day 30.

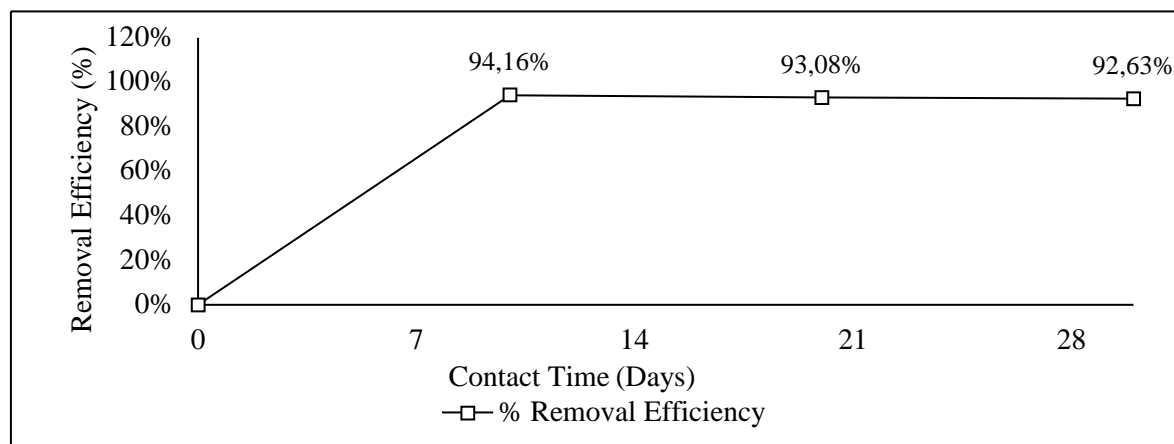


Figure 4. Removal Efficiency of Diesel Oil TPH with Varying Contact Time in SMSs Liquid Media

The removal of diesel oil TPH directly increased with the length of contact time (Figure 4). This result is also supported by the bacterial growth curve that shows bacterial consortium reached the exponential phase faster on SMSs media with diesel oil. The nutrients available in the sample at this stage are complete and suitable to support the growth of the bacterial consortium. The highest removal efficiency reached 95.48% for 20 days. The research results [28] showed that biostimulation by adding 100 grams of organic matter resulted in a TPH removal efficiency of 54.43% by a consortium of *Pseudomonas* sp. and *Bacillus* sp. in 14 days. Another study by [29] showed a TPH removal efficiency of 52.9% in 42 days by utilizing a mixed culture of *Xylocarpus granatum* mangrove sediment bacteria from the Lagoi area, Riau Islands. Compared to this study's results, using a consortium of *Lactobacillus fermentum* and *Clostridium beijerinckii* bacteria resulted in better TPH removal efficiency of 94.16% in only 10 days.

4. Conclusions

The growth response of the bacterial consortium of *L. fermentum* and *C. beijerinckii* showed that the bacterial culture could grow well in SMSs liquid media containing diesel oil contaminants under controlled environmental conditions in the pH range of 5 to 7, temperature range of 27-30°C, within 10 to 30 days. Total petroleum hydrocarbon (TPH) removal efficiency reached 94.16% at 30°C and pH 7, for 10 days. TPH removal progressed along with the consortium's growth by utilizing the carbon source in the diesel oil sample. The bacterial consortium has the potential as a biodegradator of diesel oil pollution in the environment.

Acknowledgments

The authors thank the Institute for Research and Community Service of Trisakti University, Jakarta, for funding the data analysis.

References

- [1] Nayana and V. Varghese. Degradation Studies on Diesel Oil Using Bacterial Consortium Isolated from Oil Polluted Soil. *Advanced Bio Tech*, 13 (2), 1-9.
- [2] S. Ramasamy and Arumugam Arumugam. (2017). Optimization of Enterobacter Cloacae(KU923381) for Diesel Oil Degradation Using Response Surface Methodology (RSM). *Journal of Microbiology*, 55 (2), 104-111.
- [3] N. Palanisamy, J. Ramya, S. Kumar, N. S. Vasanthi, P. Chandran and SudheerKha. (2014). Diesel Biodegradation Capacities of Indigenous Bacterial Species Isolated from Diesel Contaminated Soil. *Journal of Environmental Health Science and Engineering*, 12(1), 1-8.
- [4] J. W. Farrington. (2014). Oil Pollution in the Marine Environment II: Fates and Effects of Oil Spills. *Environment: Science and Policy for Sustainable Development*, 56(4), 16-31.

- [5] Ndimele, A. O. Saba and D. O. Ojo. (2018). Remediation of Crude Oil Spillage," in The Political Ecology of Oil and Gas Activities in the Nigerian Aquatic Ecosystem, Nigeria. *Academic Press*, 369-384.
- [6] S. Sihag, H. Pathak and a. D. P. Jarol. (2014). Factors Affecting the Rate of Biodegradation of Polyaromatic Hydrocarbons. *International Journal of Pure and Applied Bioscience*, 2(3), 185-202.
- [7] Efendi and Indiriati. (2015). Remediasi Tumpahan Minyak Menggunakan Metode Soil Washing Dengan Optimasi Kondisi Reasi. *Jurnal Teknik Lingkungan*, 21 (2), 180-189.
- [8] W. Megharaj and Venkateswarlu (2014). Bioremediation. *Encyclopedia of Toxicology*, 458-489.
- [9] D. Nuryana. (2017). Review: Bioremediasi Pencemaran Minyak Bumi. *Journal of Earth Energy Engineering*, 6(2), 9-13.
- [10] Fachrul, M.F., Rinanti, A., Tazkiaturrizku, T., Salmiati, S., & Sunaryo, T. (2021). Degradation of Polyethylene Plastic Waste by Indigenous Microbial Consortium and Fungi. *Indonesian Journal of Urban and Environmental Technology*, 5(1).
- [11] Sunaryo, T., Widyatmoko, H., Rinanti, A. (2018). Chlorpyrifos Removal by Thiobacillus sp. and Clostridium sp. in Liquid Medium. *MATEC Web of Conferences*, 197 (13007).
- [12] Marsandi and &. Estuningsih. (2016). Asosiasi konsorsium bakteri *Pseudomonas pseudoalcaligenes* dan *Micrococcus luteus* dengan lamtoro (*Leucaena leucocephala* (Lamk.) De Wit) dalam upaya meningkatkan bioremediasi minyak bumi. *Proceeding Biology Education Conference: Biology, Science, Enviromental, and Learning*, 13(1), 807-813.
- [13] Rinanti, A. & Purwadi, R. (2019). Increasing carbohydrate and lipid productivity in tropical microalgae biomass as a sustainable biofuel feed stock. *Energy Procedia*. 158, 1215-1222.
- [14] Dwicania, E., Rinanti, A., & Fachrul, M. F., (2019). Biodegradation of LLDPE plastic by mixed bacteria culture of *Pseudomonas aeruginosa* and *Brevibacterium* sp. *Journal of Physics: Conference Series*. 1402(022105)
- [15] Al-Baldawi, N. Anuar and &. I. Mushrifah. Bioaugmentation for the Enhancement of Hydrocarbon Phytoremediation by Rhizobacteria Consortium in Pilot Horizontal Subsurface Flow Constructed Wetlands. *International Journal of Environmental Science and Technology*, 14(1), 75-84.
- [16] Bhasheer, D. Banupriya, M. Thangavel and &. Y. Thangam. (2014). Diversity of Diesel Degrading Bacteria from a Hydrocarbon Contaminated Soil. *International Journal of Current Microbiology and Applied Sciences*, 3(11), 363-369.
- [17] Hamzah, AmirRabu, R. F. H. R. Azmy and &. N. A. Yussoff. (2010). Isolation and Characterization of Bacteria Degrading Sumandak and South Andsi Oils. *Sains Malaysiana*, 39(2), 161-168.
- [18] T. Schoch and J. Kunz. (2023). Heterologous 1,3-Propanediol Production Using Different Recombinant *Clostridium beijerinckii* DSM 6423 Strains. *Microorganisms*, 11(3), 784
- [19] V. Nandakumar and J. L. & Jayanthi. (2016). Hydrocarbon Fluid Inclusions, API Gravity of Oil, Signature Fluorescence Emissions and Emission Ratios: An Example from Mumbai Offshore, India. *Energy and Fuels*, 30(5), 3776-3782
- [20] G. Gottschalk. (2011). Nutrition of Bacteria. *In Clinical Microbiology and Parasitology*, 14-19.
- [21] W. A. Spinosa, V. dos Santos Júnior, D. Galvan, J. L. Fiorio and R. J. H. C. & Gomez. (2015). Vinegar rice (*Oryza sativa* L.) produced by a submerged fermentation process from alcoholic fermented rice. *Food Science and Technology* (Brazil), 35(1), 196-201.
- [22] T. Schoch and T. Baur. (2012). Heterologous 1,3-Propanediol Production Using Different Recombinant *Clostridium beijerinckii* DSM 6423 Strains. *Microorganisms*, 11(3), 784.
- [23] N. Bhakta, K. Ohnishi, Y. Munekage, K. Iwasaki and M. Q. & Wei. (2012). Characterization of lactic acid bacteria-based probiotics as potential heavy metal sorbents. *Journal of Applied Microbiology*, 112(6), 1193-1206.

- [24] R. Mishra, V. Sinha, A. Kannan and R. K. & Upreti. (2012). Reduction of chromium-VI by chromium resistant lactobacilli: A prospective bacterium for bioremediation. *Toxicology International*, 19(1), 25-30.
- [25] M. Monachese, J. P. Burton and G. & Reid. (2012). Bioremediation and tolerance of humans to heavy metals through microbial processes: A potential role for probiotics?. *Applied and Environmental Microbiology*, 78(18), 6397-6404.
- [26] Claus, H. Guillou and S. & Ellero-Simatos. (2016). The gut microbiota: A major player in the toxicity of environmental pollutants?. *Npj Biofilms and Microbiomes*, 2(3), 1-12.
- [27] D. Puspitasari and &. Khaeruddin. (2016). Kajian Bioremediasi pada Tanah Tercemar Pestisida. *Jurnal Riset Kimia*, 2(3), 98-106.
- [28] Omoni, C. Aguoru and E. & Edo. (2015). Biostimulation of Hydrocarbon Utilizing Bacteria in Soil contaminated with Spent Engine Oil Using Banana and Plantain Agro-wastes. *Journal of Soil Science and Environmental Management*, 6(8), 225-233.
- [29] Afianti and D. & Febrian. (2020). Potensi Degradasi Minyak oleh Konsorsium Bakteri dari Sedimen Mangrove Bintan. *Prosiding The 11th Industrial Research Workshop and National Seminar*, 725-729.

Bioremediation of diesel oil: potential use of bacteria consortium *Lactobacillus* *fermentum* and *Clostridium* *beijerinckii* in degrading Total Petroleum Hydrocarbon (TPH)

by Thalia Sunaryo

Submission date: 16-Nov-2024 12:11AM (UTC+0700)

Submission ID: 2318414804

File name: rosidng_Int_Scopus-2023-Bioremediation_of_diesel_oil_merged.pdf (560.29K)

Word count: 3528

Character count: 19536

Bioremediation of diesel oil: potential use of bacteria consortium *Lactobacillus fermentum* and *Clostridium beijerinckii* in degrading Total Petroleum Hydrocarbon (TPH)

Naomi Oshin Laurensa Sipahutar, *Lutfia Rahmiyati, Astri Rinanti, Melati Ferianita Fachrul, Astari Minarti

Environmental Engineering Department, Faculty of Landscape Architecture and Environmental Technology, Universitas Trisakti, Jakarta, Indonesia

*lutfiarahmiyati@trisakti.ac.id

Abstract. Diesel oil is a major petroleum-refined product known as the primary environmental pollutant due to its toxic complex hydrocarbons and difficulty in decomposing naturally. This study aims to determine the efficiency of TPH (Total Petroleum Hydrocarbon) removal in the bioremediation process of diesel oil pollution by utilizing a bacteria consortium of *Lactobacillus fermentum* and *Clostridium beijerinckii* as biocatalysts. The diesel oil degradation test was conducted on a laboratory scale using Stone Mineral Salt Solution (SMSs) liquid media with a batch system (limited culture). The temperature was set at 30°C with a rotation speed of 150 rpm for 10 days. Different treatments of pH (5, 7, 9) and contact time (10, 20, 30 days) were applied to varied diesel oil concentrations (5, 10, 20%, v/v). The oil components were measured using Gas Chromatography-Flame Ionization Detector. Diesel oil samples were put into SMSs containing 10% bacterial consortium and 10% NPK fertilizer. The sensitivity test showed that the bacterial consortium was resistant, proven by the absence of an inhibition zone around the disc paper area containing diesel oil. The highest TPH removal efficiency found was 97.3% when 5% diesel oil was degraded by the bacterial consortium at pH 7 for 20 days. This study proves that the bacterial consortium can be recommended in bioremediation to alleviate diesel oil pollution in the environment.

Keywords: Diesel oil; Bioremediation; Total Petroleum Hydrocarbon (TPH); *Lactobacillus fermentum*; *Clostridium beijerinckii*

1. Introduction

Environmental pollution by petroleum and petroleum-related compounds, especially diesel oil, increases yearly. Diesel oil pollution is an ecological disaster affecting human social life and has biohazard effects on the surrounding environment [1]. Diesel oil is an engine fuel that contains hydrocarbons with C chains ranging from C8-C26 and polyaromatic hydrocarbons (PAHs) [2]. Diesel oil is a marine water and soil pollutant [3]. Soil contaminated with diesel oil spills affects the soil's ecological environment, impacting human activities. The environment affected by spills or contamination derived from diesel oil will experience changes in physical composition and chemical composition that affect the soil's texture and composition, thereby reducing soil porosity [4-5]. About 1.7 to 8.8 million metric tonnes of hydrocarbons, including diesel oil, are reported to pollute land and marine areas annually [6]. The pollution problem by diesel oil can be addressed in several ways, including using physical-chemical methods (e.g., in situ burning, adsorption, chemical dispersants, soil washing, and sorbents) and



Content from this work may be used under the terms of the [Creative Commons Attribution 3.0 licence](https://creativecommons.org/licenses/by/3.0/). Any further distribution of this work must maintain attribution to the author(s) and the title of the work, journal citation and DOI.

Published under licence by IOP Publishing Ltd

biological methods. The current waste management technology for this problem is the bioremediation method [7]. Bioremediation is a detoxification method that aims to reduce pollution levels in recovering the environment affected by oil contamination [8-11]. In the petroleum bioremediation process, the use of bacterial consortium can affect the degradation process because each type of bacteria requires a specific substrate to degrade the petroleum components [12-14]. Some bacteria isolated from diesel oil-contaminated areas, e.g., *Lactobacillus* sp., *Acinetobacter* sp., *Vibrio* sp., *Moraxella* sp., and *Clostridium* sp., can reduce the content of diesel oil [15-18]. This study aims to determine the growth response of *Lactobacillus fermentum* and *Clostridium beijerinckii* bacterial consortium in environmental conditions polluted with diesel oil. The optimum condition will be tested using variations in pH and contact time that obtain the highest TPH (Total Petroleum Hydrocarbon) removal efficiency during the petroleum degradation process.

2. Materials and Methods

2.1. Diesel Oil Characterisation

The petroleum samples used were tested at the Lemigas ESDM Laboratory, Jakarta, using the gravimetric method to test Total Petroleum Hydrocarbon (TPH) concentration and Gas Chromatography-Flame Ionisation Detector (GC-FID).

2.2. Bacterial Cultivation and Growth Analysis

The bacterial consortium used in this study was *Lactobacillus fermentum* and *Clostridium beijerinckii*. They were cultivated in SMSs (Stone Mineral Salt Solution) growth media, a liquid media containing minerals and salts, i.e., 1 g Na₂HPO₄·7H₂O, 2.5 g NH₄NO₃, 0.5 g CaCO₃, 0.5 g MgSO₄·7H₂O, 0.2 g MnCl₂·7H₂O, and 0.5 g KH₂PO₄. The minerals and salts were dissolved in 1 liter of distilled water and then sterilized using an autoclave at 121°C for 30 minutes. The bacterial consortium act as a biocatalyst and was cultivated for 120 hours at 30°C using a shaker incubator with a rotational speed of 150 rpm. During cultivation, the bacterial consortium was given additional nitrogen source nutrients of 5% liquid NPK fertilizer. Growth curves were made using Total Plate Count (TPC) by counting the number of cells every 24 hours for 240 hours. Similarly, the ability of bacteria to reduce the levels of diesel oil compounds was indicated by the number of living bacteria from the beginning to the end of the study, which was calculated using the TPC method.

2.3. Sensitivity Test of Bacterial Consortium *L. fermentum* dan *C. beijerinckii* on Diesel Oil

The sensitivity test was performed to test the sensitivity or susceptibility of the bacterial consortium to the pollutant load, i.e., diesel oil. The bacterial consortium was placed in a petri dish containing liquid NA, then allowed to solidify. Paper discs exposed to diesel oil were placed on the solid NA and were incubated for 48 hours at 37°C.

2.4. Diesel Oil Degradation Test in SMSs Liquid Media

The diesel oil degradation test was done stepwise in a batch system with SMSs liquid media to find the optimum conditions for each parameter tested. The variations of each parameter were acidity value (pH) with variations of 5, 7, 9; contact time with variations of 10, 20, 30 days; and diesel oil concentration with variations of 5, 10, 20 % v/v. The composition used for pH and contact time optimization was 70% SMSs media (v/v), 10% NPK fertilizer (v/v), 10% bacterial consortium (v/v), and 10% diesel oil (v/v). Samples were replicated twice, and each replicate was incubated at 30°C using a shaker incubator with a rotational speed of 150 rpm. Each sample was tested by Lemigas ESDM Laboratory, Jakarta, to obtain Total Petroleum Hydrocarbon (TPH) levels. The lowest final TPH level from the variable results of pH, contact time, and diesel oil concentration will determine the optimum performance conditions of the bacterial consortium in degrading the TPH content in diesel oil. The formula used to calculate the TPH removal efficiency is as follows:

$$\% \text{ TPH Degradation} = 100\% \times \frac{B - A}{B}$$

B is the initial TPH concentration before the degradation test (%), and A is the final TPH concentration after degradation (%).

3. Result and Discussion

The results of diesel oil characterization from the Lemigas ESDM Laboratory, Jakarta, show results that can be seen in the gas chromatography - flame ionization detector (GC-FID) analysis in Figure 1 and are classified based on specific gravity or API gravity were classified by specific gravity or API gravity (Table 1).

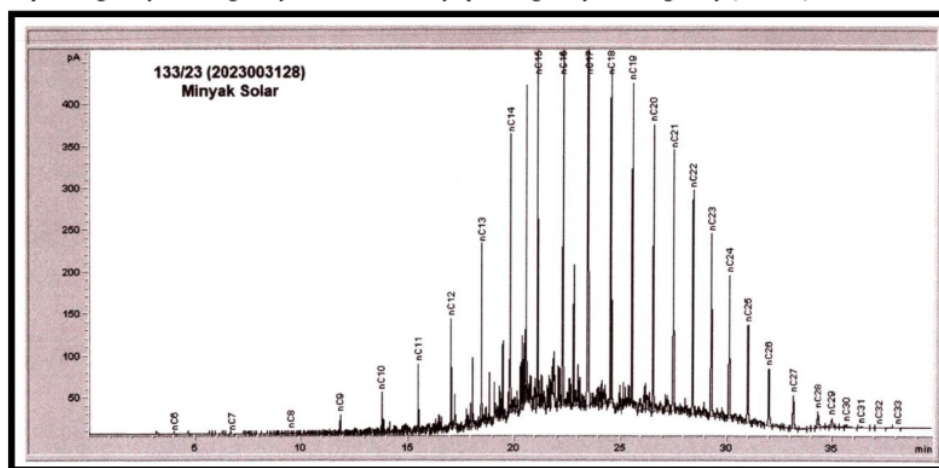


Figure 1. Initial Concentration of Diesel Oil

Based on Figure 1, that diesel oil has a chain of C15-C19 carbon atoms which can be seen from the peaks on the graph. It can also be seen from the graph that diesel oil is derived from the number of C33 carbon atoms which may have a low molecular weight that appears at the initial mooring time and is thought to be an isomer of branched alkanes. The mechanism for the formation of these compounds could not be explained in this study.

Table 1. Diesel Oil Samples Characteristics.

Parameters	Unit	Value	Methods
Density at 15°C	Kg/m ³	855,6	ASTM D 4052
API	-	33,8	ASTM D 4052
Specific Gravity at 60/60 °F	-	0.8560	ASTM D 4052
TPH	%	87,27	Gravimetry

The specific gravity and API values based on preliminary characterization tests were 0.8610 and 32.85. These characteristics indicate that the diesel oil sample is a medium oil with a range of 31°-58° [19]. Total Petroleum Hydrocarbon (TPH) showed a value of 99.47%. The initial diesel oil characterization results were used as a reference for the initial TPH concentration before the bacterial consortium removed diesel oil TPH.

The growth of bacterial consortium *L. fermentum* and *C. beijerinckii* in SMSS media with and without the addition of diesel oil as a contaminant can be seen in Figure 2. The growth of the bacterial consortium without contaminants lasted for 240 hours. During cultivation, there were 3 growth phases: exponential, stationary, and death. Cultivation of bacteria without petroleum on SMSs media showed an exponential

phase that lasted from 0 hours to 144 hours. In this phase, the bacterial consortium began to adapt to the growth media and experienced a rapid increase in cell number. The bacterial consortium entered the stationary phase after 144 to 168 hours, characterized by a constant growth in the number of bacterial cells. After 168 hours, the death phase occurs, characterized by a decrease in the number of bacteria because the nutrients in the growth medium have begun to decrease; hence, bacterial cell metabolism also decreases.

Cultivation of bacterial consortium on SMSs media containing petroleum showed an exponential phase from 0 to 120 hours. The stationary phase occurs after 120 to 168 hours, indicated by the constant growth of the bacteria. The bacterial consortium began to enter the death phase with a decrease in the number of cells after 168 hours.

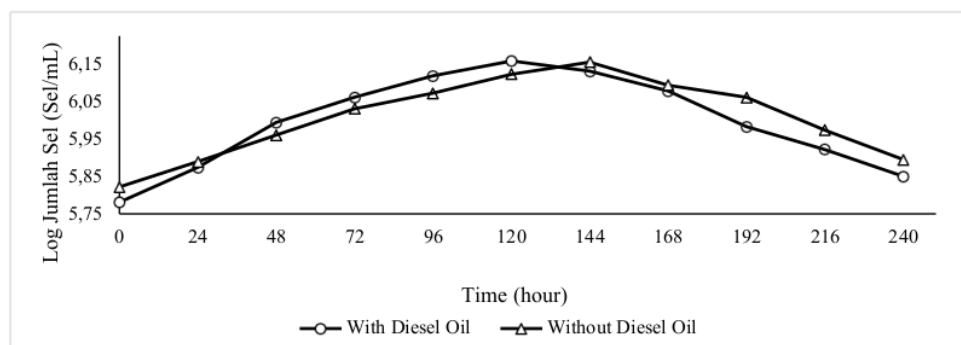


Figure 2. The Growth of Bacterial Consortium in SMSS Media With and Without Diesel Oil

The bacterial consortium added with diesel oil enters the exponential phase faster than bacterial cultivation in SMSs media without contaminants (Figure 2). The exponential phase starts at hours 72 to 120. A rapid increase in the number of bacteria characterizes the exponential phase. It seems that the bacterial consortium of *L. fermentum* and *C. beijerinckii* could utilize the carbon element in petroleum as a nutrient source for cell metabolic activities, so bacterial cells divide faster. After hour 120, the bacteria entered the stationary phase until hour 168, characterized by a constant bacterial growth rate so that the number of bacterial cells decreased slightly. The availability of macronutrients and micronutrients that are complete, appropriate, and with the proper ratio is crucial to support bacterial growth. Bacterial cells' main constituents are carbon, oxygen, hydrogen, and nitrogen. These elements, primarily carbon, are crucial substrates to produce energy in bacteria so bacterial metabolism can occur properly [20-21].

Figure 3 shows the results of the sensitivity test of *L. fermentum* and *C. beijerinckii* bacteria to petroleum, where no inhibition zone formed around the disc paper containing petroleum. This result indicates that both bacteria are resistant or insensitive to petroleum and can grow in environments or media containing petroleum. Based on these results, the bacterial consortium showed the ability to degrade the TPH content in petroleum.



Figure 3. Result of Sensitivity Test of *L. fermentum* and *C. beijerinckii* Exposed to Diesel Oil (a) hour 0; (b) hour 24; and (c) hour 48

The resistant nature of *C. beijerinckii* to petroleum was shown by its ability to utilize hydrocarbons and cut long C chains to produce shorter C atoms [22]. Meanwhile, the resistant nature of *L. fermentum* to petroleum is shown by its ability to bind and detoxify xenobiotic compounds [23-26].

The degradation process lasted 10 days with pH variations of 5, 7, and 9 (Table 2). The lowest removal efficiency (94.87%) occurred in treatment with pH 5, while the highest removal efficiency (95.77%) occurred at pH 7. Based on these results, the optimum pH for the degradation process of diesel oil TPH by a consortium of bacteria *L. fermentum* and *C. beijerinckii* occurred at pH 7. This result is supported by [27], who mentioned that bacteria used for biodegradation generally occur at neutral pH.

Table 2. Degradation of Diesel Oil TPH with Varying pH in SMSs Liquid Media

pH variation	Initial TPH	Final TPH	Removal efficiency (%)
	concentration (%; w/w)	Concentration (%; w/w)	
5	87.27	5.10	94.16%
7	87.27	8.18	90.63%
9	87.27	7.98	90.86%
Kontrol	87.27	1.85	97.88%

All pH variations resulted in a removal efficiency higher than 94% (Table 2). A pH value of 8-9.5 can cause microorganisms to die. Bacteria can grow and develop well in neutral pH conditions. Therefore, pH will affect the rate of biodegradation reactions influenced by changes in the ion structure on the active side of the bacterial enzyme work. The acidic pH value can be adjusted to neutral with the addition of lime to increase the decomposition or degradation of diesel oil twice. This pH adjustment can change the solubility, bioavailability, form of chemical compounds, and macro and micronutrients.

At t_0 , the initial TPH concentration was 87.27% (w/w), while on days 10, 20, and 30, the TPH concentration dropped to 5.1% (w/w), 6.1% (w/w) and 7.2% (w/w) respectively (Figure 4). TPH removal increased with increasing contact time until day 20 and no additional removal until day 30.

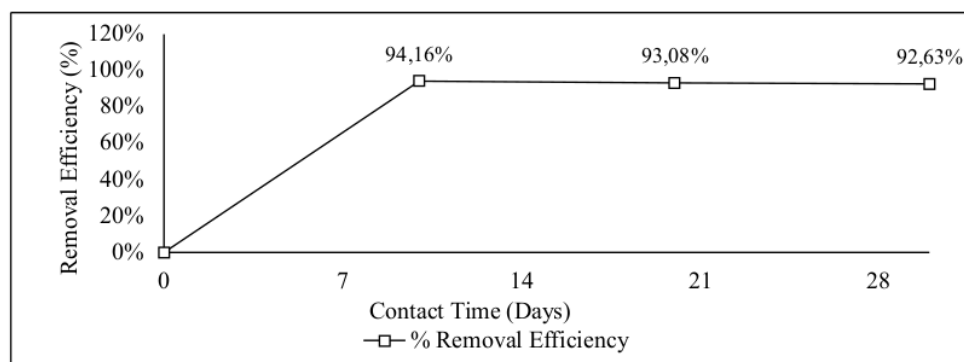


Figure 4. Removal Efficiency of Diesel Oil TPH with Varying Contact Time in SMSs Liquid Media

The removal of diesel oil TPH directly increased with the length of contact time (Figure 4). This result is also supported by the bacterial growth curve that shows bacterial consortium reached the exponential phase faster on SMSs media with diesel oil. The nutrients available in the sample at this stage are complete and suitable to support the growth of the bacterial consortium. The highest removal efficiency reached 95.48% for 20 days. The research results [28] showed that biostimulation by adding 100 grams of organic matter resulted in a TPH removal efficiency of 54.43% by a consortium of *Pseudomonas* sp. and *Bacillus* sp. in 14 days. Another study by [29] showed a TPH removal efficiency of 52.9% in 42 days by utilizing a mixed culture of *Xylocarpus granatum* mangrove sediment bacteria from the Lagoi area, Riau Islands. Compared to this study's results, using a consortium of *Lactobacillus fermentum* and *Clostridium beijerinckii* bacteria resulted in better TPH removal efficiency of 94.16% in only 10 days.

4. Conclusions

The growth response of the bacterial consortium of *L. fermentum* and *C. beijerinckii* showed that the bacterial culture could grow well in SMSs liquid media containing diesel oil contaminants under controlled environmental conditions in the pH range of 5 to 7, temperature range of 27-30°C, within 10 to 30 days. Total petroleum hydrocarbon (TPH) removal efficiency reached 94.16% at 30°C and pH 7, for 10 days. TPH removal progressed along with the consortium's growth by utilizing the carbon source in the diesel oil sample. The bacterial consortium has the potential as a biodegradator of diesel oil pollution in the environment.

Acknowledgments

The authors thank the Institute for Research and Community Service of Trisakti University, Jakarta, for funding the data analysis.

References

- [1] Nayana and V. Varghese. Degradation Studies on Diesel Oil Using Bacterial Consortium Isolated from Oil Polluted Soil. *Advanced Bio Tech*, 13 (2), 1-9.
- [2] S. Ramasamy and Arumugam Arumugam. (2017). Optimization of Enterobacter Cloacae(KU923381) for Diesel Oil Degradation Using Response Surface Methodology (RSM). *Journal of Microbiology*, 55 (2), 104-111.
- [3] N. Palanisamy, J. Ramya, S. Kumar, N. S. Vasanthi, P. Chandran and SudheerKha. (2014). Diesel Biodegradation Capacities of Indigenous Bacterial Species Isolated from Diesel Contaminated Soil. *Journal of Environmental Health Science and Engineering*, 12(1), 1-8.
- [4] J. W. Farrington. (2014). Oil Pollution in the Marine Environment II: Fates and Effects of Oil Spills. *Environment: Science and Policy for Sustainable Development*, 56(4), 16-31.

- [5] Ndimele, A. O. Saba and D. O. Ojo. (2018). Remediation of Crude Oil Spillage," in The Political Ecology of Oil and Gas Activities in the Nigerian Aquatic Ecosystem, Nigeria. *Academic Press*, 369-384.
- [6] S. Sihag, H. Pathak and a. D. P. Jarol. (2014). Factors Affecting the Rate of Biodegradation of Polyaromatic Hydrocarbons. *International Journal of Pure and Applied Bioscience*, 2(3), 185-202.
- [7] Efendi and Indiriaty. (2015). Remediasi Tumpahan Minyak Menggunakan Metode Soil Washing Dengan Optimasi Kondisi Reasi. *Jurnal Teknik Lingkungan*, 21 (2), 180-189.
- [8] W. Megharaj and Venkateswarlu (2014). Bioremediation. *Encyclopedia of Toxicology*, 458-489.
- [9] D. Nuryana. (2017). Review: Bioremediasi Pencemaran Minyak Bumi. *Journal of Earth Energy Engineering*, 6(2), 9-13.
- [10] Fachrul, M.F., Rinanti, A., Tazkiaturrizku, T., Salmiati, S., & Sunaryo, T. (2021). Degradation of Polyethylene Plastic Waste by Indigenous Microbial Consortium and Fungi. *Indonesian Journal of Urban and Environmental Technology*, 5(1).
- [11] Sunaryo, T., Widyatmoko, H., Rinanti, A. (2018). Chlorpyrifos Removal by Thiobacillus sp. and Clostridium sp. in Liquid Medium. *MATEC Web of Conferences*, 197 (13007).
- [12] Marsandi and &. Estuningsih. (2016). Asosiasi konsorsium bakteri Pseudomonas pseudoalcaligenes dan Micrococcus luteus dengan lamtoro (Leucaena leucocephala (Lamk.) De Wit) dalam upaya meningkatkan bioremediasi minyak bumi. *Proceeding Biology Education Conference: Biology, Science, Environmental, and Learning*, 13(1), 807-813.
- [13] Rinanti, A. & Purwadi, R. (2019). Increasing carbohydrate and lipid productivity in tropical microalgae biomass as a sustainable biofuel feed stock. *Energy Procedia*. 158, 1215-1222.
- [14] Dwicania, E., Rinanti, A., & Fachrul, M. F., (2019). Biodegradation of LLDPE plastic by mixed bacteria culture of Pseudomonas aeruginosa and Brevibacterium sp. *Journal of Physics: Conference Series*. 1402(022105)
- [15] Al-Baldawi, N. Anuar and &. I. Mushrifah. Bioaugmentation for the Enhancement of Hydrocarbon Phytoremediation by Rhizobacteria Consortium in Pilot Horizontal Subsurface Flow Constructed Wetlands. *International Journal of Environmental Science and Technology*, 14(1), 75-84.
- [16] Bhasheer, D. Banupriya, M. Thangavel and &. Y. Thangam. (2014). Diversity of Diesel Degrading Bacteria from a Hydrocarbon Contaminated Soil. *International Journal of Current Microbiology and Applied Sciences*, 3(11), 363-369.
- [17] Hamzah, AmirRabu, R. F. H. R. Azmy and &. N. A. Yussoff. (2010). Isolation and Characterization of Bacteria Degrading Sumandak and South Andsi Oils. *Sains Malaysiana*, 39(2), 161-168.
- [18] T. Schoch and J. Kunz. (2023). Heterologous 1,3-Propanediol Production Using Different Recombinant Clostridium beijerinckii DSM 6423 Strains. *Microorganisms*, 11(3), 784
- [19] V. Nandakumar and J. L. & Jayanthi. (2016). Hydrocarbon Fluid Inclusions, API Gravity of Oil, Signature Fluorescence Emissions and Emission Ratios: An Example from Mumbai Offshore, India. *Energy and Fuels*, 30(5), 3776-3782
- [20] G. Gottschalk. (2011). Nutrition of Bacteria. *In Clinical Microbiology and Parasitology*, 14-19.
- [21] W. A. Spinoso, V. dos Santos Júnior, D. Galvan, J. L. Fiorio and R. J. H. C. & Gomez. (2015). Vinegar rice (*Oryza sativa* L.) produced by a submerged fermentation process from alcoholic fermented rice. *Food Science and Technology* (Brazil), 35(1), 196-201.
- [22] T. Schoch and T. Baur. (2012). Heterologous 1,3-Propanediol Production Using Different Recombinant Clostridium beijerinckii DSM 6423 Strains. *Microorganisms*, 11(3), 784.
- [23] N. Bhakta, K. Ohnishi, Y. Muneke, K. Iwasaki and M. Q. & Wei. (2012). Characterization of lactic acid bacteria-based probiotics as potential heavy metal sorbents. *Journal of Applied Microbiology*, 112(6), 1193-1206.

- [24] R. Mishra, V. Sinha, A. Kannan and R. K. & Upreti. (2012). Reduction of chromium-VI by chromium resistant lactobacilli: A prospective bacterium for bioremediation. *Toxicology International*, 19(1), 25-30.
- [25] M. Monachese, J. P. Burton and G. & Reid. (2012). Bioremediation and tolerance of humans to heavy metals through microbial processes: A potential role for probiotics?. *Applied and Environmental Microbiology*, 78(18), 6397-6404.
- [26] Claus, H. Guillou and S. & Ellero-Simatos. (2016). The gut microbiota: A major player in the toxicity of environmental pollutants?. *Npj Biofilms and Microbiomes*, 2(3), 1-12.
- [27] D. Puspitasari and &. Khaeruddin. (2016). Kajian Bioremediasi pada Tanah Tercemar Pestisida. *Jurnal Riset Kimia*, 2(3), 98-106.
- [28] Omoni, C. Aguoru and E. & Edoh. (2015). Biostimulation of Hydrocarbon Utilizing Bacteria in Soil contaminated with Spent Engine Oil Using Banana and Plantain Agro-wastes. *Journal of Soil Science and Environmental Management*, 6(8), 225-233.
- [29] Afianti and D. & Febrian. (2020). Potensi Degradasi Minyak oleh Konsorsium Bakteri dari Sedimen Mangrove Bintan. *Prosiding The 11th Industrial Research Workshop and National Seminar*, 725-729.

Bioremediation of diesel oil: potential use of bacteria consortium *Lactobacillus fermentum* and *Clostridium beijerinckii* in degrading Total Petroleum Hydrocarbon (TPH)

ORIGINALITY REPORT

19%

SIMILARITY INDEX

17%

INTERNET SOURCES

12%

PUBLICATIONS

9%

STUDENT PAPERS

MATCH ALL SOURCES (ONLY SELECTED SOURCE PRINTED)

1%

★ Submitted to Liverpool John Moores University

Student Paper

Exclude quotes Off

Exclude matches Off

Exclude bibliography Off

Bioremediation of diesel oil: potential use of bacteria consortium *Lactobacillus fermentum* and *Clostridium beijerinckii* in degrading Total Petroleum Hydrocarbon (TPH)

GRADEMARK REPORT

FINAL GRADE

GENERAL COMMENTS

/100

PAGE 1

PAGE 2

PAGE 3

PAGE 4

PAGE 5

PAGE 6

PAGE 7

PAGE 8