

PAPER • OPEN ACCESS

Peer Review Statement

To cite this article: 2023 *IOP Conf. Ser.: Earth Environ. Sci.* **1175** 011002

View the [article online](#) for updates and enhancements.

You may also like

- [Peer review declaration](#)
- [Peer review declaration](#)
- [Peer Review Statement](#)



UNITED THROUGH SCIENCE & TECHNOLOGY

 **The Electrochemical Society**
Advancing solid state & electrochemical science & technology

**248th
ECS Meeting**
Chicago, IL
October 12-16, 2025
Hilton Chicago

**Science +
Technology +
YOU!**

**Register by
September 22
to save \$\$**

REGISTER NOW

The banner features a woman in a brown blazer smiling and gesturing. The background is blue with a network of white dots and lines. The top and bottom borders consist of a repeating pattern of blue and white circular arrows.

Peer Review Statement

All papers published in this volume have been reviewed through processes administered by the Editors. Reviews were conducted by expert referees to the professional and scientific standards expected of a proceedings journal published by IOP Publishing.

1. Type of peer review: Single anonymous
2. Conference submission management system: Morressier
3. Number of submissions received: 34
4. Number of submissions sent for review: 32
5. Number of submissions accepted: 24
6. Acceptance Rate (Submissions Accepted / Submissions Received × 100): 70.6 %
7. Average number of reviews per paper: 1.00 *
8. Total number of reviewers involved: 2
9. Contact person for queries:
Name: Dr. Joni Safaat Adiansyah
Affiliation: Universitas Muhammadiyah Mataram
Email: joni.adiansyah@ummat.ac.id



PREFACE

On behalf of the organizing committee, I would like to welcome all of you to the 2nd International Conference on Mining and Environmental Technology (ICMET) that will be held from 18th to 19th of August 2022. We also have the post conference activities on 20th of August.

The mining issues emerge and influence not only the human life but also the environment, on the other side technology plays a significant role to minimize the impacts of mining activities. The synergizing between those aspects would lead to social license to operate and good mining practices application. These two main goals have motivated the researchers and relevant actors to engage themselves with continuous discussion on mining, environment and technology. This is timely placed with the theme of our conference ‘Good Mining Practices and Its Application’. It is hoped that the conference will lead to cross fertilization of ideas and act as a catalyst for collaborations at both the national and international levels.

I am pleased to inform you that there will be 33 papers presented across plenary session and three parallel sessions using offline and online methods. Paper presenters are from Australia, Malaysia, Vietnam, Turkey, and Indonesia. We have very diverse presenter from Indonesia represents Consultant, Universities and Mining Companies. I would like to convey my deepest gratitude to the keynote speakers: Professor Irwandy Arif from Ministry of Energy and Mineral Resources Republic of Indonesia, A/Prof. Kathryn Sturman from The University of Queensland Australia, A/Prof. Lim Jeng Shiun from Universiti Teknologi Malaysia, A/Prof. Phung Kim Le from Ho Chi Minh University of Technology Vietnam, and Mr. Hazqil Araf from PT Amman Mineral Nusa Tenggara. I also take this opportunity to thank our sponsors namely Ministry of Education and Culture Republic of Indonesia, PT Amman Mineral Nusa Tenggara, PT Major Drilling Indonesia, PT Dahana, and PT Semen Padang for their great support. In addition, my special appreciation goes to government of west nusa tenggara that providing us with the Welcoming Dinner tonight.

Lastly, I hope the conference will bring a new exciting experience, provide a good platform to make friends, networks and learn from each other. I hope your stay in Lombok will be enjoyable and a memorable one. Thank you.

With best wishes,

Joni Safaat Adiansyah, Ph.D
Organizing Committee Chairman



Conference Committees

Conference General Chair

Joni Safaat Adiansyah, Universitas Muhammadiyah Mataram, Indonesia

Conference Program Chairs

Arif Wijaya, Universitas Muhammadiyah Mataram, Indonesia

I Gde Dharma Atmaja, Universitas Pendidikan Mataram, Indonesia

Aditya Budi Nugraha, Universitas Muhammadiyah Tasikmalaya, Indonesia

Steering Chair

Diah Rahmawati, Universitas Muhammadiyah Mataram, Indonesia

Scientific Committees

Irwandy Arif, Ministry of Energy and Mineral Resources, Indonesia

Kathryn Sturman, University of Queensland, Australia

Wahidul Biswas, Curtin University, Australia

Phung Kim Le, Ho Chi Minh City University of Technology, Vietnam

Lim Jeng Shiun, Universiti Teknologi Malaysia, Malaysia

Datu Buyung Agusdinata, Arizona State University, USA

Arifudin Idrus, Universitas Gadjah Mada, Indonesia

Luthfi Muta'ali, Universitas Gadjah Mada, Indonesia

Waterman Sulisty, Universitas Pembangunan Nasional Veteran Yogyakarta, Indonesia

Jorina Waworuntu, PT Amman Mineral Nusa Tenggara, Indonesia

Radjali Amin, Institut Teknologi Yogyakarta, Indonesia

Yun Arifatul Fatimah, Universitas Muhammadiyah Magelang, Indonesia

Berli Paripurna Kamiel, Universitas Muhammadiyah Yogyakarta, Indonesia

Table of contents

Volume 1175

2023

← [Previous issue](#) [Next issue](#) →

The 2nd International Conference on Mining and Environmental Technology 17/08/2022 - 19/08/2022 Online

Accepted papers received: 21 April 2023

Published online: 18 May 2023

Open all abstracts

Preface

OPEN ACCESS

011001

Preface

 [View article](#)  [PDF](#)

OPEN ACCESS

011002

Peer Review Statement

 [View article](#)  [PDF](#)

The 2nd International Conference on Mining and Environmental Technology

OPEN ACCESS

012001

Utilization of low-density emulsion to increase blasting efficiency and safety environment

J F Lubis and R H Handayana

 [View article](#)  [PDF](#)

OPEN ACCESS

012002

Study of Flyrock to Reduce Safe Radius from 500 m to 300 m on Blasting Quarry at PT Vale Indonesia, Sorowako, Luwu Timur, South Sulawesi

M R Eko, R H Haris, J Lubis and N P Deri

 [View article](#)  [PDF](#)

OPEN ACCESS

012003

An Analysis of Blasthole Condition towards Toxic Fumes Generation from Blasting Activities in Surface Mine

P N Hartami, Y Maulana, T T Purwiyono, E J Tuheteru, D H Kusumo, D Putra and M Burhannudinnur

 [View article](#)  [PDF](#)

OPEN ACCESS

012004

Progress evaluation of limestone mine in PT. Panca Mitra Makmur using drone to achieve june-july 2021 production target

L S Marliani, B Himawan and A B Nugraha

 [View article](#)  [PDF](#)

OPEN ACCESS

012005

Aquifer Geometry Identification and Determination of Aquifer Storage and Recovery (ASR) in Bandung

F Agustin, C I Abdullah, D Herlina, M F Akhyar, R Amukti, B Himawan and R N Adiputra

 [View article](#)  [PDF](#)

OPEN ACCESS

012006

An Analysis of Single Slope Stability at Pemenang Road Using Bishop Method

N A Putri, Azwalanas, Ahamid, Harditia, Alpiana and Hidayati

 [View article](#)  [PDF](#)

OPEN ACCESS

012007

Analysis of Andesite Rock Slope Stability with Bishop Method

M A Maodin, Faryansah, S D Ariadi, G S Verlandi, Alpiana and Hidayati

[!\[\]\(9dfdaff1d86ba3c1f8353b4d1b61b8c5_img.jpg\) View article](#) [!\[\]\(bcef2083a617d3f771f1bcdf2f97158d_img.jpg\) PDF](#)

OPEN ACCESS

012008

The effect of physical properties of sandstone on the compression strength of rock

K Shulhin, B Aprillah, Alpiana, D Rahmawati, A A Salsabila and M Iqbal

[!\[\]\(3cb60d42b10e53f9522bb0b392c1c4cd_img.jpg\) View article](#) [!\[\]\(6ee5a6cf4633ecad4ab1623b5ee8b864_img.jpg\) PDF](#)

OPEN ACCESS

012009

Analysis of Slope Stability Using Applied Research Methods A Case Study at Taman Ayu Gerung Village, Gerung District, West Lombok Regency, West Nusa Tenggara Province

M Yusuf, D Helmalia, P Ramadhoan, Zubaidin, Alpiana and Hidayati

[!\[\]\(274fd520e03b61c1b9ffc861754cacdc_img.jpg\) View article](#) [!\[\]\(cd41623988aee99b5b915fa19a633d9e_img.jpg\) PDF](#)

OPEN ACCESS

012010

Slope Stability Analysis Using Bishop Method and Slide 2D Software at Sand Stone Mining in Sedau Village, Narmada District, Lombok Barat Regency

M Gunawan, Hidayati and R Adam

[!\[\]\(8aa05b4b06c05d58ddd90cdbf335b307_img.jpg\) View article](#) [!\[\]\(4982c9ecf91d6fbabe93ceb6fe1e46ea_img.jpg\) PDF](#)

OPEN ACCESS

012011

The comparison of physical and mechanical properties of sand in Sedau and Obel-Obel Village

M F Firaz and Isfanari

[!\[\]\(9cfd7b8995754ae2aef7ec59dba55501_img.jpg\) View article](#) [!\[\]\(545e22137c1a6385ed46ac5b61de8912_img.jpg\) PDF](#)

OPEN ACCESS

012012

Biomass potential as an alternative resource for valuable products in the perspective of environmental sustainability and a circular economy system

S Martini, D Kharismadewi, Mardwita and Y R Ginting

 [View article](#)  [PDF](#)

OPEN ACCESS

012013

Research on The Impact of Ciliwung River Water on The Surrounding Environment in The DKI Jakarta Area

J R Rajagukguk and D A Pranoto

 [View article](#)  [PDF](#)

OPEN ACCESS

012014

Spectral And Fractal Analysis of Volcanic Tremor at Ijen Volcano, Indonesia

A Wildani, S Maryanto, D R Santoso and H Triastuty

 [View article](#)  [PDF](#)

OPEN ACCESS

012015

Contribution of Obi Island Reducing the Carbon Footprint in the Transport Sector

TH Gultom, D Nugraha, Sugiyarno and M Iqbal

 [View article](#)  [PDF](#)

OPEN ACCESS

012016

Geochemical Characterization of Pit Wall Rocks: A Preliminary Step in Predicting the Water Quality of Pit Lake

G J Kusuma, E J Tuheteru, A Badhurahman, K Pranoto, Y Palinggi, H S Wahyudi, G R Pratama and R S Gautama

 [View article](#)  [PDF](#)

OPEN ACCESS

012017

Strategies on Degraded Lake Management for Sustainable Environmental Ecosystem in Lake Limboto, Gorontalo

O Sumule, R F Sitompul, S Sriharti and H W Retno

 [View article](#)  [PDF](#)

OPEN ACCESS

3D inversion modelling of gravity and geomagnetic in the coastal aquifer of the Mandalika Lombok

012018

A Taurida Alaydrus, A Susilo, S Minardi, A Naba and T Panji Abraham

 View article  PDF

OPEN ACCESS

012019

Utilization of fly ash and bottom ash for tailings stabilization

M C N Deni and T Kurniasari

 View article  PDF

OPEN ACCESS

012020

Mercury Reduction on Gold Extraction in Artisanal and Small-Scale Gold Mining. A Case Study in Pelangan Village, West Nusa Tenggara Province, Indonesia

D Rahmawati, J S Adiansyah, B F A Matrani and H I Johari

 View article  PDF

OPEN ACCESS

012021

Environmental Improvement Policy through the obligation of post-tin mining reclamation in the islands of Bangka Belitung

D Haryadi, Ibrahim and Darwance

 View article  PDF

OPEN ACCESS

012022

The Impact of Sand Mining on Socio-Economic and Environmental Sectors: A Case Study on Sedau Village, Narmada District, West Lombok Regency, Indonesia

I Saputra, Ferry, D Rahmawati, S S Aulia and H Sidik

 View article  PDF

OPEN ACCESS

012023

Legal Protection for the Community Around the Sand Mining In Ijobalit Village, East Lombok Regency

W Hartati, Alpiana and Ariyanto

 [View article](#)

 [PDF](#)

OPEN ACCESS

012024

The Impact of Sand Mining on the Socio-economic Community

F Susanti, S A P Lestari and R F A Nugraha

 [View article](#)

 [PDF](#)

JOURNAL LINKS

[Journal home](#)

[Journal scope](#)

[Information for organizers](#)

[Information for authors](#)

[Contact us](#)

[Reprint services from Curran Associates](#)

IOPSCIENCE

Journals

Books

IOP Conference Series

About IOPscience

Contact Us

Developing countries access

IOP Publishing open access policy

Accessibility

IOP PUBLISHING

Copyright 2024 IOP Publishing

Terms and Conditions

Disclaimer

Privacy and Cookie Policy

Text and Data mining policy

PUBLISHING SUPPORT

Authors

Reviewers

Conference Organisers

IOP



PAPER • OPEN ACCESS

An Analysis of Blasthole Condition towards Toxic Fumes Generation from Blasting Activities in Surface Mine

To cite this article: P N Hartami *et al* 2023 *IOP Conf. Ser.: Earth Environ. Sci.* **1175** 012003

View the [article online](#) for updates and enhancements.

You may also like

- [A side-scattering imaging method for the in-line monitoring of particulate matter emissions from cooking fumes](#)
Wu Zhou, Cong Mei, Jinwei Qin et al.
- [FUMES. III. Ultraviolet and Optical Variability of M-dwarf Chromospheres](#)
Girish M. Duvvuri, J. Sebastian Pineda, Zachory K. Berta-Thompson et al.
- [Relation between biomarkers in exhaled breath condensate and internal exposure to metals from gas metal arc welding](#)
Frank Hoffmeyer, Monika Raulf-Heimsoth, Tobias Weiss et al.

 The Electrochemical Society
Advancing solid state & electrochemical science & technology

UNITED THROUGH SCIENCE & TECHNOLOGY

248th ECS Meeting Chicago, IL October 12-16, 2025 *Hilton Chicago*



Science + Technology + YOU!

Register by September 22 to **save \$\$**

[REGISTER NOW](#)

An Analysis of Blasthole Condition towards Toxic Fumes Generation from Blasting Activities in Surface Mine

P N Hartami¹, Y Maulana^{1*}, T T Purwiyono¹, E J Tuheteru¹, D H Kusumo¹, D Putra¹, M Burhannudinnur²

¹Department of Mining Engineering, Faculty of Earth and Energy Technology, Universitas Trisakti.

²Department of Geological Engineering, Faculty of Earth and Energy Technology, Universitas Trisakti.

*Email: yuga.maulana@trisakti.ac.id

Abstract. One impact of blasting activities is the release of toxic fumes capable of disturbing living creatures around the blasting zone. Fumes are affected by several factors, including blasthole conditions. Measurement for this research was performed in a coal mine called PT. Kaltim Prima Coal in Kalimantan, Indonesia, to investigate the impact mentioned above through a quantitative method, which was performed directly in the field. The results show that the formed CO gas level ranged between 60.34 – 360.29 ppm, while the formed NO₂ gas level ranged between 0.3 – 3.16 ppm, with average temperature and relative humidity of the blastholes at 31°C and 77.01%, respectively. Based on these results, the temperature and relative humidity conditions in the blastholes have a linear effect on the formation of toxic fumes by 84%. Considering the average wind speed at the measurement sites was 2.14 m/s, the trend of decreasing toxic fumes, time variables, and threshold limit values of exposure for humans of up to 15-minutes, it can be concluded that the safe time for workers to return to the site is less than 1 minute.

1. Introduction

Blasting is a method extensively used in civil engineering and mining industry. Apart from its efficiency in dismantling rocks, it also has several adverse impacts on the environment and humans (workforce) [1], [2]. Direct adverse impacts from this conventional rock dismantling method are flying rocks, ground vibrations, excess air pressure, broken backbone, and generation of fumes [3]–[5]. Fumes are gases having toxic properties due to the imbalanced chemical reaction during blasting activities. The gases formed are CO and NO_x. Both post-explosion fumes are direct products of the detonation process. The release of these fumes can negatively affect human health and safety and the environment within the radius of the blast sites [6]. Since NO_x is unstable and soluble in air, its concentration will decrease rapidly after air movements, such as wind and ventilation. CO is relatively more stable, however, it is the main cause of poisoning. Once the CO concentration reaches its peak, it will not disappear quickly. It will take time to disappear, and this dynamic affects worker safety [7].

NO_x is nitrogen oxide (NO) and nitrogen dioxide (NO₂). These gases are hazardous and capable of causing severe health risks to the exposed workers. There is a difference between nitrogen oxide and nitrogen dioxide in terms of exposure effect towards the humans body. An example of this difference is the hazardous threshold concentration (ppm) and length of exposure of each toxin. NO₂ with a concentration of 805 ppm can cause lethal choking in just 15 seconds of exposure, while NO with a



concentration of 8,000 ppm and an exposure time of 60 seconds only causes loss of consciousness. [8]. Many studies and measurements on fumes, especially in underground mines, have been done for the past few years. Analysis of toxic fumes generation in underground mines has been developing rapidly, one of which is by using a one-dimensional mathematical model and three-dimensional CFD numerical simulations to analyze the concentration and movement of fumes from blasting activities. [9], [10]. However, only a handful of measurements and analyses are carried out in open-pit mining with the application of the same methodology, i.e. qualitative methodology through visual observation of the types of the formed toxic fumes to determine the hazard level. [1], [8], [11], [12]. Research progresses on the toxic fumes measurement between open-pit and underground mines are significantly different [13].

Classification of toxic fumes generated from explosions based solely on visual observations cannot be used as a standard representing the level of hazard toxic fumes may pose. Based on the results of measurements using a gas detector, the white toxic gas still contains CO and NO₂, making it highly hazardous for mine workers, especially the blasting crews who carry out post-blast inspection [14]. Furthermore, the colour of the blasted fumes cannot be adequately classified due to the dust generated by the cutting materials from blasthole drilling. The formed dust makes it challenging to distinguish gasses. Therefore, clear measurement standards are needed to measure toxic fumes formed in open-pit mines. Standard methods to measure the level of toxic fumes resulting from explosions that can be performed safely, quickly and accurately are also required. This research was conducted in PT. Kaltim Prima Coal (PT. KPC), a coal mine in East Kalimantan, Indonesia.

2. Methods

The research was conducted using action research and experimental methods with qualitative and quantitative approaches. The action research method aims to calculate the levels of toxic fumes formed from detonation, and the experimental method aims to find the right way to collect toxic fumes data.

2.1 Research Site

PT Kaltim Prima Coal, also known as PT KPC, is a company operating coal mining activities by applying the open-pit mining method and selling coal to domestic and international customers from various industrial sectors. PT KPC can produce more than 50 million tons of coal per year, while it requires blasting activities as a method of excavation. PT Kaltim Prima Coal exports most of its products to various countries in Asia, America, Europe, and the Mediterranean. At the same time, it only sells approximately 3% of its total production in the domestic market. The location of this research is PT KPC, Sangatta Sub-district, East Kutai Regency, East Kalimantan Province, Indonesia.

2.2 Post-blast fumes

Post-blast fumes are toxic nitrogen oxides and direct byproducts of the detonation process. We can easily identify it as a yellow or orange post-blast cloud. Nitrogen oxides can also be produced from burning reactions and secondary oxidation of NO to NO₂ as the post-blasting fumes are mixed with air. The most commonly used explosive product in the mining industry is ammonium nitrate fuel oil (ANFO) [8].

2.3 Blasthole temperature, relative humidity and wind velocity

Data collection on the temperature and humidity of the blastholes was carried out before filling explosives into the holes [15]. We measured temperature and humidity in the blastholes using the TSI 9545-A. The measurement was carried out by inserting a probe into the blastholes at a minimum depth of 3 inches (7.5 cm) from the hole mouth to improve the accuracy of the measurement results (TSI Velocity Calc operation and service manual). The measurement took place until the temperature and humidity were constant, approximately 10 seconds after the insertion probe was inserted into the holes.

Wind direction and speed data were collected before blasting. Wind direction is determined through flag direction in the blasting area, and wind speed is measured using an anemometer, Krisbow KW06-653. The speed measurement was carried out at the higher elevation blasting area, such as an

embankment confining the blasting area. The measurement lasted for ± 10 minutes to ensure accurate results. In addition, wind direction and speed measurements are used as supporting data in drawing a toxic fumes distribution map and determining the level of post-detonation toxic fumes reduction during the measurement.

2.4 The levels of CO and NO₂ fumes generated from the blasting

Wind direction must be considered when measuring the toxic fumes generated from the blasting. Therefore, a drone was used in the measurements. Therefore, the drone's flying route must be opposite the wind to allow the toxic fumes to move towards the drone. The drone used was the DJI Phantom 4 Pro+ with a maximum speed (S) of 45 m/hour, a maximum altitude of 500 m, and a maximum remote-control range of 4 miles (6.4 km). A gas detector was tied using rope to the drone leg, as shown in Figure 3a. The drone flew immediately after the detonation was performed. Since PT AEL Indonesia used an electronic detonator product, the frequency of the drone signal could interfere with the detonation. The gas detector used was the MSA Altair 5x, which can measure CO, O₂, H₂S, and NO₂ gases, and the alarm limit levels can be set for STEL, TWA, and high alarm conditions, as shown in Figure 1a. MSA Altair 5x can measure CO gas up to 2,000 ppm, NO₂ up to 20 ppm, and H₂S up to 200 ppm. The drone and the MSA Altair 5X gas detector used in the measurement are available in Figure 1b.



Figure 1. Tools for measurement a. Gases measured by MSA Altair 5x; b. Drone used to carry

3. Results and Discussion

3.1. Blasthole and Weather Conditions

This study measures blasthole temperature and humidity as supporting factors in toxic fumes generation. The temperature and humidity values in the blastholes are strongly affected by the weather and conditions of the blastholes. Wind direction and speed were measured to determine the direction and distance of the fumes' movement at a specific time and to predict the locations significantly affected by the fumes scattered in the wind direction. Data on wind direction and speed were measured before the blasting. Wind direction data was used as supporting data in measuring fume levels using a drone, while wind speed data was the basis for predicting fume movement. Table 1 shows the temperature and humidity of the blastholes and the velocity of wind in every blasting location.

Table 1. Blastholes, wind and fumes conditions for every location

Date (DD/MM)	Location	Temperature (°C)	Relative humidity (%)	Wind velocity (m/s)	Number of wet holes	Percentage of wet holes (%)	CO (ppm)	NO ₂ (ppm)
23 Nov	Peri 309	31.61	75.91	2.46	16	7	150.86	1.05
25 Nov	Tania 549	32.67	72.92	2.02	140	92	111.81	0.30
28 Nov	Melawan 098	28.92	82.53	1.83	48	40	324.79	2.11

30 Nov	Tania 558	29.73	79.3	2.68	0	0	195.23	1.80
3 Dec	Melawan 108	31.09	74.21	3.61	128	78	60.34	0.75
5 Dec	Melawan 110	30.84	77.39	2.13	80	67	207.65	1.35
7 Dec	Peri 323	30.91	74.43	1.00	0	0	76.32	1.05
15 Dec	Tania 573	31.91	75.58	2.58	32	23	90.52	0.45
16 Dec	Peri 326	31.38	78.89	1.92	97	78	227.18	1.50
18 Dec	Melawan 130	30.3	76.51	1.31	83	58	95.84	1.20
23 Dec	Tania 577	31.03	75.51	2.05	58	98	115.36	0.45
26 Dec	Peri 338	31.63	80.94	2.19	24	27	243.15	1.95
31 Dec	Mustahil 148	31.23	75.58	1.08	10	20	360.29	3.16

When this research was conducted, rainfall was high enough to result in high humidity values in the blastholes because rainwater entered the blast holes. The measurements were carried out in different weather conditions; sunny weather, with temperatures ranging from 33°C - 36°C and humidity ranging from 65% - 73%; cloudy weather, with temperatures ranging from 30°C - 32°C and humidity ranging from 73% - 78%; and the weather after rain with temperatures ranging from 27 - 30°C and humidity between 78% - 85%.

3.2. Fumes Measurement

The method of fume level measurements using a drone was considered very effective and safe. The measurements were performed in safe blasting-distance areas of 500 meters. The drone was released to fly after detonations were conducted in the areas because the drone signal could interfere with the Base Station signal. Gas contents measured in every blasting location are available in Table 1. We used visual weighting or fume classification as a standard because no other standards are available to classify fumes generated from blasting in open-pit and underground mines based on their contents, as shown in Figure 4. Fumes are classified based on visual observation of the colour of the generated fumes, in which the colour indicates the hazard level of the fumes [8].

3.3. Analysis

Weather and the materials in the blasting locations affect the temperature and humidity of the blastholes. The blastholes' humidity has an average value of 70% - 80%. High moisture values found in the blastholes are caused by the presence of water in the holes, which is due to the high groundwater level at the locations and rainwater. High-water content in the blastholes causes a decrease in blastholes temperature, so water vapour formation increases the humidity value in the blastholes. Based on the results of the fume level measurements by a drone, the greater the humidity value of the blastholes, the higher the fumes content is.

Based on the linear regression value shown in Figure 2, a hypothesis can be drawn: blasthole's humidity affects Zero Oxygen Balance conditions in explosives, resulting in Negative Oxygen Balance or the explosive mixture lacking oxygen value and resulting in CO gas. A deeper analysis of the effect of hole humidity on chemical mixture and reactions of explosives is required. Thus the hypothesis that blasthole humidity reduces the oxygen content in explosives and explosive reactions can be proven. Blastholes humidity in other mine sites needs to be investigated, as each has different conditions. Meanwhile, different conditions in mine sites lead to valuable materials and minerals diversity. The average condition of the blasthole in every wet blasting location is caused by the presence of water in it, as shown in Table 1. The use of S320 DRN 100 Eco emulsion with an emulsion percentage of 80%

and AN-prill 20% has increased the level of explosive resistance to water. Therefore, wet blastholes resulting from water presence do not affect the formation of toxic fumes.

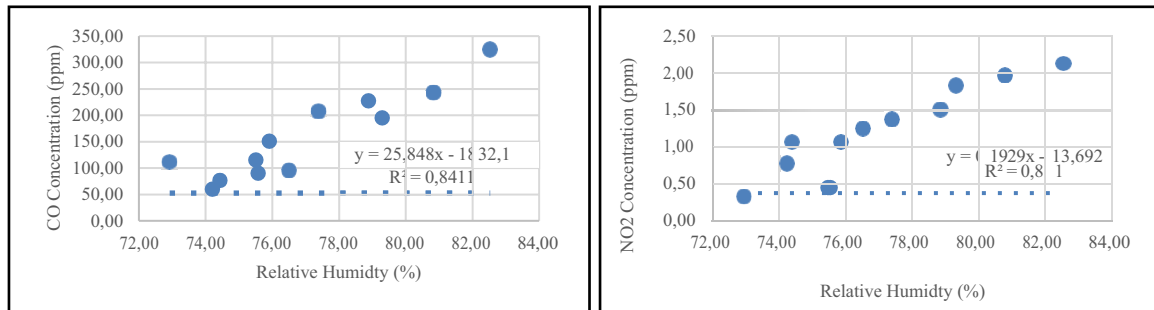


Figure 2. Graphic of relative humidity to the formation of NO₂ and CO gas

The number of blastholes filled with water was affected by weather and the presence of groundwater in rocks. A high percentage of holes filled with water can affect the temperature and humidity of the blastholes due to the increased water level in the blastholes. Based on measurement data of the water content in rocks tested at PT KPC geotechnical laboratory, a comparison can be performed against the level of toxic fumes formed using a linear regression equation, as shown in Figure 3.

The linear regression value of the water content factor in the rock on the formed CO and NO₂ gas content has a low level of confidence (R²). This is because the water content measurement in rocks using drilling and cutting samples did not reflect the actual conditions in the blastholes, while measurement provided less accurate data. Therefore, the water content in rocks does not significantly affect the formation of toxic gases (fumes) generated from blasting.

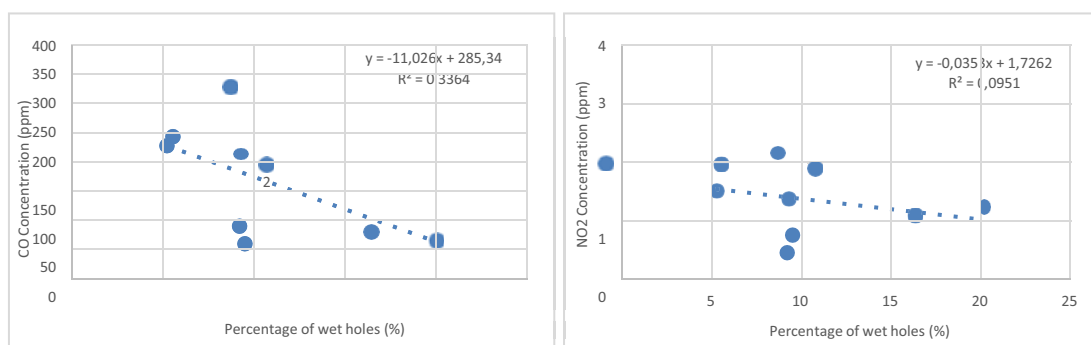


Figure 3. Graphic of wet hole percentage to the NO₂ and CO gas formation

4. Conclusion

The blasting fumes formed during blasting activities in PT KPC are CO gas and NO₂ gas. The maximum CO gas content formed due to blasting activities is 360.29 ppm, while the maximum NO₂ gas content formed due to blasting activities is 3.16 ppm. The water condition parameter in the blastholes has no significant effect on the formation of fumes, but relative humidity in the blastholes affects fumes formation resulting from the blasting activities. Based on the Threshold Limit Value (STEL) and the relatively fast reduction of toxic fumes, it can be stated that workers can enter the blasting areas in less than one minute after detonation.

ACKNOWLEDGMENTS

This paper has been supported and funded by the Faculty of Earth and Energy Technology, Trisakti University. Researchers also express their gratitude to PT Kaltim Prima Coal for facilitating this research and allowing measurements for data collection be appropriately completed.

References

- [1] Sućeska M, Tumara B S, Škrlec V, and Stanković S 2021 Prediction of concentration of toxic gases produced by detonation of commercial explosives by thermochemical equilibrium calculations *Defence Technology*, doi: 10.1016/j.dt.2021.10.011
- [2] Hartami P N *et al.*, 2021 Simulation of Surface Delay Modification to Reduce Blasting Vibration at PT Agincourt Resources *Indonesia Mining Journal*, volume 4:109-117.
- [3] Al-Bakri A and Hefni M 2021 A review of some nonexplosive alternative methods to conventional rock blasting *Open Geosciences* 13(1):431-442 doi: 10.1515/geo-2020-0245.
- [4] Mária Hernád and Kugyela Lóránd 2012 Risk of Carbon Monoxide Intoxication in Explosions *Hadmernok vol. 2*
- [5] Maulana Y, Hartami P N, Fitriyani O, and Nugroho B 2022 Study of Simulation of Ignition Patterns of Explosion Vibration at PT Semen Indonesia Tbk *Indonesia Mining Journal* volume 5:33-34.
- [6] Chen J, Qiu W, Rai P and X. Ai 2021 Emission Characteristics of CO and NOx from Tunnel Blast Design Models: a Comparative Study *Polish Journal of Environmental Studies* 30(6):5503–5517 doi: 10.15244/pjoes/136482.
- [7] Huang R, Shen X, Wang B and X. Liao 2020 Migration characteristics of CO under forced ventilation after excavation roadway blasting: A case study in a plateau mine *Journal of Cleaner Productio*, volume 267, 122094 doi: 10.1016/j.jclepro.2020.122094.
- [8] Onederra I, Bailey V, Cavanough G, Torrance A, Torrance A and Torrance A 2012 Understanding main causes of nitrogen oxide fumes in surface blasting *Mining Technology*, volume 121: 151-159 doi: 10.1179/1743286312y.0000000019.
- [9] Menéndez J *et al.* 2022 Concentration, Propagation and Dilution of Toxic Gases in Underground Excavations under Different Ventilation Modes *International Journal of Environmental Research and Public Health* 19(12), 7092; doi: 10.3390/ijerph19127092.
- [10] Torno S and Toraño J 2020 On the prediction of toxic fumes from underground blasting operations and dilution ventilation. Conventional and numerical models *Tunneling and Underground Space Technology* 96(2):103194; doi: 10.1016/j.tust.2019.103194.
- [11] Araos M and Onederra I 2015 Development of a novel mining explosive formulation to eliminate nitrogen oxide fumes *Mining Technology* 124(1):1743286314Y.000; doi: 10.1179/1743286314y.0000000074.
- [12] D. of Natural Resources, “Queensland Guidance Note,” 2017. [Online]. Available: https://www.resources.qld.gov.au/_data/assets/pdf_file/0010/212500/qld-guidance-note-20-mgmt-oxides-nitrogen.pdf
- [13] Mainiero R J 1997 A Technique for Measuring Toxic Gases Produced by Blasting Agents *Proc 23rd Annual Conference on Explosives and Blasting Technique*. Cleveland, OH: International Society of Explosives Engineers, 1997 Jan; :595-604
- [14] Department of Education and Safe Work Australia, 2018. *Workplace exposure standards for airborne contaminants*. [Online]. Available: https://www.safeworkaustralia.gov.au/sites/default/files/2022-09/workplace_exposure_standards_for_airborne_contaminants_-_1_october_2022.pdf
- [15] McCaffrey M A and Su B Y 2001 Subsurface migration of toxic fumes from surface construction blasting *Paper presented at the DC Rocks 2001, The 38th U.S. Symposium on Rock Mechanics (USRMS)*, Washington, D.C., July 2001. Paper Number: ARMA-01-0381