

PAPER NAME

Samura_2024_IOP_Conf._Ser._Earth_En
viron._Sci._1339_012020.pdf

AUTHOR

Cahaya Rosyidan

WORD COUNT

3367 Words

CHARACTER COUNT

16628 Characters

PAGE COUNT

10 Pages

FILE SIZE

882.9KB

SUBMISSION DATE

May 17, 2024 10:47 PM GMT+7

REPORT DATE

May 17, 2024 10:47 PM GMT+7

● **18% Overall Similarity**

The combined total of all matches, including overlapping sources, for each database.

- 14% Internet database
- 9% Publications database
- Crossref database
- Crossref Posted Content database
- 10% Submitted Works database

● **Excluded from Similarity Report**

- Manually excluded sources
- Manually excluded text blocks

PAPER • OPEN ACCESS


Physical property comparison of polymeric KCl sludge composition and polyamine at different temperatures

To cite this article: Lisa Samura *et al* 2024 *IOP Conf. Ser.: Earth Environ. Sci.* **1339** 012020

2 [View the article online](#) for updates and enhancements.

You may also like

- [Work adaptations insufficient to address growing heat risk for U.S. agricultural workers](#)
Michelle Tigchelaar, David S Battisti and June T Spector
- [Comparison of methanol and ethylene glycol effectiveness as chemical inhibitors in the prevention of gas hydrates in well testing barge DT-05 well Z Mahakam field](#)
Purnomosidi, W Igor and I Erdila
- [Quantifying the impact of changing the threshold of New York City heat emergency plan in reducing heat-related illnesses](#)
Tarik Benmarhnia, Lara Schwarz, Amruta Nori-Sarma et al.

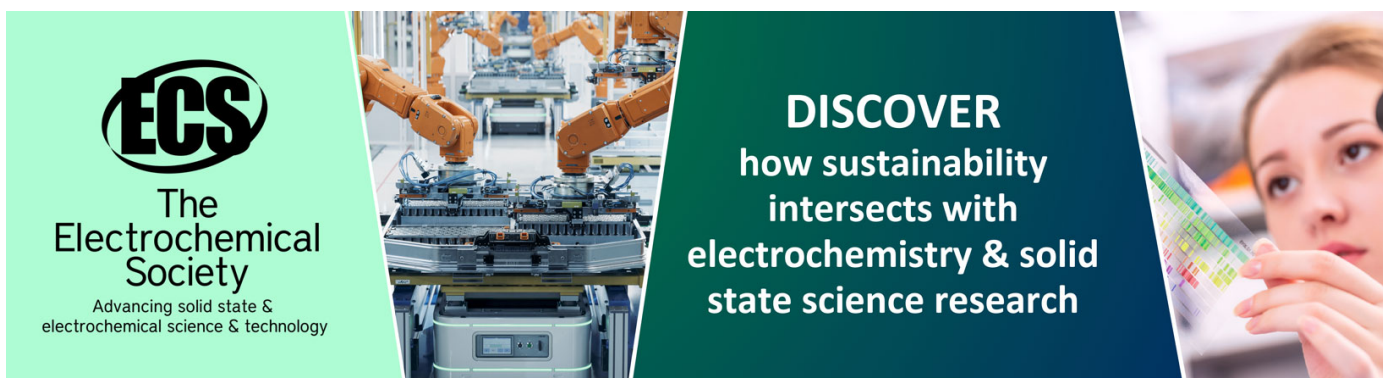

ECS
The
Electrochemical
Society
Advancing solid state &
electrochemical science & technology

DISCOVER
how sustainability
intersects with
electrochemistry & solid
state science research

Physical property comparison of polymeric KCl sludge composition and polyamine at different temperatures

Lisa Samura^{1*}, Cahaya Rosyidan¹, Mustamina Maulani¹, Suryo Prakoso¹, Bayu Satiyawira¹, Maman Djumantara¹, Onnie Ridaliani¹, Mulia Ginting¹ and Mohammad Apriniyadi²

¹Petroleum Engineering, FTKE, Universitas Trisakti, Jakarta, Indonesia

²Geology Engineering, FTKE, Universitas Trisakti, Jakarta, Indonesia

*corresponding author's: lisa.samura@trisakti.ac.id

Abstract. Drilling mud is a fluid used to assist the drilling process. The composition and physical properties of the mud greatly influence a drilling operation. Drilling operations that penetrate formations with shale content have the potential to experience drilling problems related to shale hydration. To get a good ability to prevent shale hydration, mud is added with polymeric and polyamine KCl additives (shale inhibitors) with the aim of stabilizing shale in contact with drilling fluid, as well as preventing drill cuttings from forming colloids. The results obtained in the KCl polymer mud composition at temperatures of 80°F, 250°F, and 300°F for mud weight were 9.3 ppg, 9.1 ppg, and 9 ppg, respectively. Funnel viscosity was 40 sec/qt, 36 sec/qt, and 34 sec/qt. Tap rates were 4.8 cc, 6 cc, and 6.6 cc. Mud cake remained at 1 mm and pH also remained at 9. While the results obtained on polyamine mud composition at temperatures of 80°F, 250°F, and 300°F for mud weight were 9.2 ppg, 8.9 ppg, and 8.8 ppg, respectively. Funnel viscosity was 26 sec/qt, 20 sec/qt, and 17 sec/qt. Tap rate of 10 cc, 13.8 cc, and 15 cc. Mud cake of 1 mm, 2 mm, and 2 mm. pH remains at 9. The data obtained shows that the results of the physical properties of polymeric KCl mud are better than polyamine mud.

1. Introduction

People could not understand the term drilling mud in ancient times. Water was the only means of lifting drill shale or cutting. Then, as time went on, drilling technology has progressed. Drilling mud was first used to increase the success rate of a drilling operation. Determining the type and content of mud is critical for increasing the success and smoothness of a drilling operation. In this scenario, the appropriateness of the mud type and composition with the formation conditions to be drilled can reduce drilling costs. [1]–[3]

Drilling mud is crucial in a drilling process. Drilling that is fast, safe, and affordable is heavily determined by the circumstances and mud systems used. The condition under question here is how the mud's characteristics or rheology [4]. While the mud system referred to here is a specific sort of mud that must be used while taking into account formation and borehole conditions. Non-disperse KCl polymer muds must sustain or preserve the hydration and dispersion process of the drilled shale formation as much as feasible. The most typical method is to limit the quantity of water that reacts with the shale by blanketing the cutting formed by the shale with polymer as quickly as possible to avoid additional reactivity with water. [4], [5]



It is possible to conclude that KCl polymer mud is a mud used to control chemical reactions in shale strata. Because the primary element is water, this mud is a sort of water base mud. This mud is most suited for use in formations with laminar shale, clay, and limestone rock types, as well as rocks with a high amount of sloughing shale and clay swelling. The most common mud system utilized in drilling is polymeric KCl mud. The technology is built around an anionic encapsulating polymer fluid, which encapsulates drill cuttings during hole cleaning. In water, KCl degrades into K^+ and Cl^- ions. K^+ ions will replace Na^+ ions in the stabilization of shale minerals. As a result, in plate shale, K^+ ions are bound much stronger than Na^+ ions with plate clay between clay and water, reducing the repulsion force between plate clay particles in water. The stronger the attraction between clay, the more water is released from the system. This is due to the fact that K^+ ions have a large atomic radius, which can close the shale microfracture and prevent water from entering the microfracture, reducing shale drying (hydration). [6]–[8]

The polyamine used is a quarternary ammonium salt that inhibits water absorption in shales and clays (water absorption) while also preventing dispersion (non dispersion). Polyamine is a shale inhibitor material that has many advantages over KCl, including its environmentally friendly nature. Since 1980, various polyamine research and development has been conducted, but it has not been able to completely replace the function of KCl as a shale inhibitor. [9], [10]

Because of its ability to stabilize clay when drilling through water-sensitive shale, polyamine is used in high-performance water-based drilling fluids. Wellbore stability has historically been a major concern during drilling operations due to the possibility of water-sensitive shale formations hydrating when in contact with aqueous drilling fluids. Clay hydration in water-sensitive formations causes wellbore degradation via two mechanisms: swelling and clay dispersion. Swelling of clay from the formation frequently results in hole tightening and increased pipe sticking, whereas dispersion frequently results in hole washout and shale weakening. [11], [12]

The purpose of this study was to compare the results of physical properties between KCl Polymer Mud Composition with Polyamine at Various Temperatures.

2. Method

This study was carried out at Universitas Trisakti's Laboratory of Drilling and Production Engineering. The first step was to collect six mud samples. The first three samples are polymeric KCl mud compositions with the same material that will be tested at 80°F, 250°F, and 300°F. While the fourth through sixth samples are polyamine mud compositions containing the same materials that will be tested at temperatures of 80°F, 250°F, and 300°F, respectively. Fresh water is used in the polymer KCl mud composition. KOH is used to control the pH. As viscosifiers and water loss controllers, bentonite and pac-LV are used. It can also be used to make mud cakes because it controls water loss. As biopolymers and rheology modifiers, XCD and PHPA are used. [13], [14]

The main ingredient of mud, KCl polymer, is a shale inhibitor that can replace Ca^{2+} ions with K^+ ions. K-Soltex was developed as a shale inhibitor and to strengthen K^+ ions derived from KCl polymer. Barite can be used as a weighting agent or to increase density, thinner, fluid loss control, and dispersant with lignosulfonate. Finally, defoamer is used to reduce foaming. The ingredients in the polyamine mud composition are the same as those in the polymer KCl composition, except that the polymer KCl and K-Soltex ingredients are replaced with polyamine, which acts as a shale inhibitor. With the same ingredients, it will then be heated in the oven for 1 hour at temperatures of 80°F, 250°F, and 300°F, with a comparison of the results between the KCl polymer mud composition and polyamine. [15]–[17]

3. Result and Discussion

Laboratory research on the physical and rheological properties of drilling mud necessitates standardization of drilling mud properties that have become standard provisions of the research. This mud is produced in two systems: KCL and Polyamine. Table 1 shows the standard specification data for KCl and Polyamine mud at 80 °F, 250 °F, and 300 °F temperatures.

Table 1. Composition Comparison Results of Polymeric KCl Sludge with Polyamine.

Physical properties of mud	KCl Polymer			Polyamine			Unit
	80°F	250°F	300°F	80°F	250°F	300°F	
Mud Weight	9.3	9.1	9	9.2	8.9	8.8	ppg
Funnel Viscosity	40	36	34	26	20	17	sec/qt
Plastic Viscosity	20	17	15	14	10	8	cp
Yield Point	24	19	17	17	12	10	lbs/100 ft ²
Apparent Viscosity	32	26.5	23.5	22.5	16	13	cp
600 RPM	64	53	47	45	32	26	-
300 RPM	44	36	32	31	22	18	-
200 RPM	40	33	28	27	18	15	-
100 RPM	35	29	24	23	13	11	-
6 RPM	20	14	11	10	7	5	-
3 RPM	16	11	8	7	5	3	-
Gel strength 10 seconds	16	11	8	7	5	3	lbs/100 ft ²
Gel strength 10 minutes	26	20	16	14	10	6	lbs/100 ft ²
Screening rate	4.8	6	6.6	10	13.8	15	cc
Mud cake	1	1	1	1	2	2	mm
pH	9	9	9	9	9	9	-

The density of mud is the mass per unit volume of mud that influences the buoyant effect on a solid particle; the higher the density of an object, the greater the mass per volume. A Mud Balance tool is used in laboratory research to determine density of mud. Figure 1 shows the results of measuring the density of KCL and Polyamine muds at various temperatures.

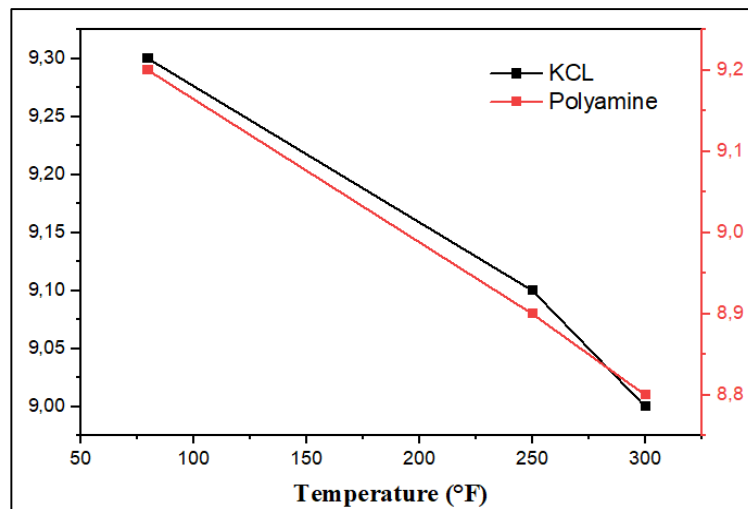


Figure 1. Mud weight of KCL and Polyamine.

The viscosity of the mud is critical in raising a drill shale (cutting) to the surface. The higher the viscosity in a mud, the easier it is to lift the drill flakes; however, as the viscosity decreases, the drill flakes become more difficult to separate from the cuttings. Viscosity is the resistance to mud flow during circulation, which can occur due to a shift between drill mud particles.

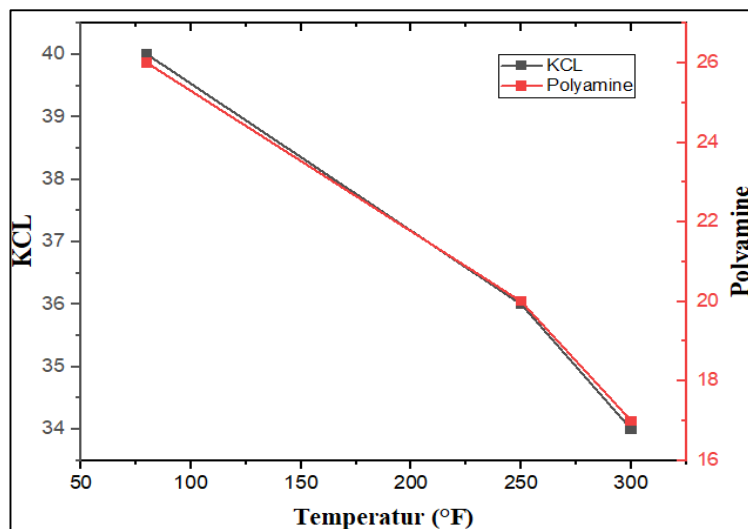


Figure 2. Funnel Viscosity of KCL and Polyamine.

Plastic viscosity is a flow resistance caused by friction between solids in mud, liquid solids, and friction between liquid layers. The following is the result of reading the Plastic Viscosity value with the Fann VG meter tool in Figure 3.

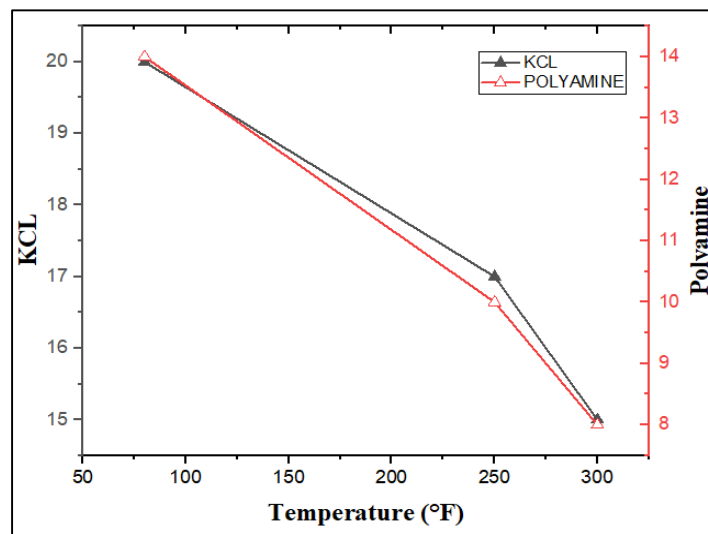


Figure 3. Plastic Viscosity of KCL and Polyamine.

Yield Point measures the attraction of solid particles in mud. Low yield points can lead to barite precipitation and poor hole cleaning. A high Yield Point, on the other hand, can result in increased circulation pressure, is difficult to stir in the tank, and has a tendency to retain gas in the mud. Figure 4 depicts the results of the Yield Point measurements of KCL and Polyamine muds at various temperatures.

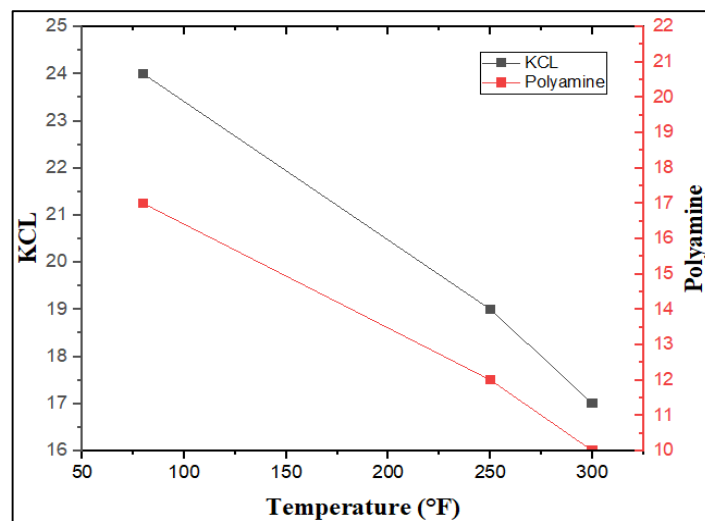


Figure 4. Yield point of KCL and Polyamine.

The gel strength of mud is a measure of its resistance to flow from a stationary state. When the mud is at rest or not circulating, the gel strength should be high enough to prevent cuttings from moving downward. Gel strength measurements are usually taken twice for standardization, once at the beginning of 10 seconds or right after sludge circulation is stopped and again after 10 minutes or right when circulation resumes. Figure 5: Gel strength value results after 10 seconds of calculation

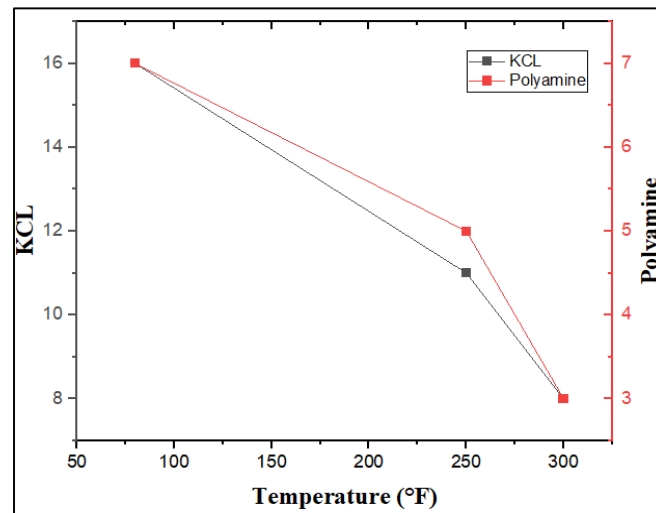


Figure 5. Gel Strenght 10 sekon of KCL and Polyamine.

Figure 6 depicts the results of the 10-minute gel strength calculation for the KCL and Polyamine sludge systems:

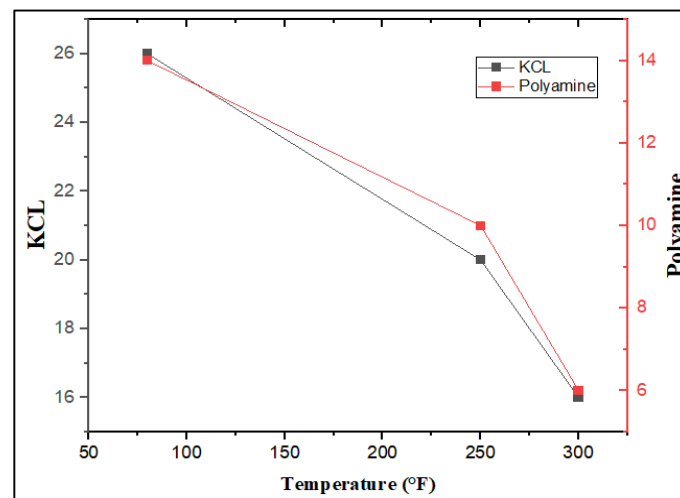


Figure 6. Gel Strenght 10 minute of KCL and Polyamine.

The rate of drilling mud filtering is made up of both solid and liquid components. Because the wellbore wall has pores in general, the mud's liquid component will enter the borehole wall. The sieve rate is an indication of the amount of liquid entering the formation that is affected by temperature, pressure, and solids. The invaded zone is the area infiltrated by mud, while the incoming liquid is known as the filtrate.

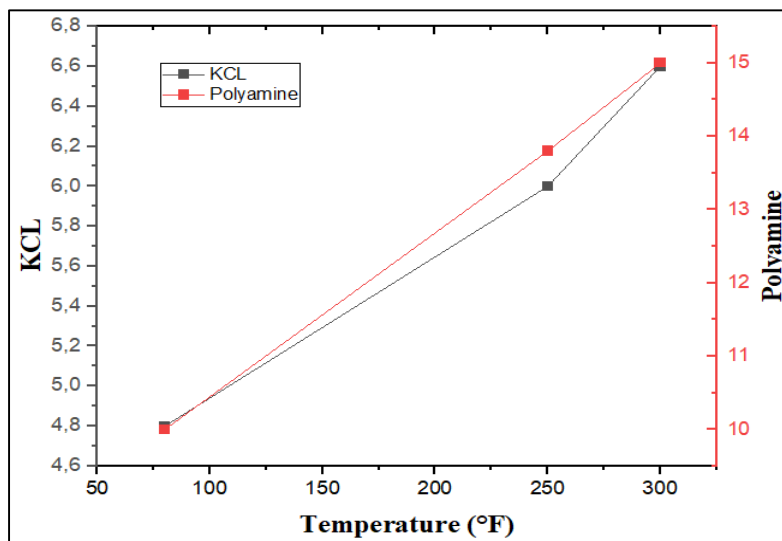


Figure 7. Water loss of KCL and Polyamine.

The sieve rate's goal is to form a mud cake on the borehole wall. A good mud cake is thin to reduce the possibility of pinching the drill pipe, strong to help stabilize the borehole, and solid to ensure that the filtrate that enters the formation is not excessive. A good mud cake is thin to reduce the possibility of pinching the drill pipe, strong to help stabilize the borehole, and dense to ensure that the filtrate that enters the formation is not excessive. Thick mud cake will clamp the drilling pipe, making it difficult to lift and rotate, while the filtrate that enters the formation will damage the formation and can cause damage to the formation.

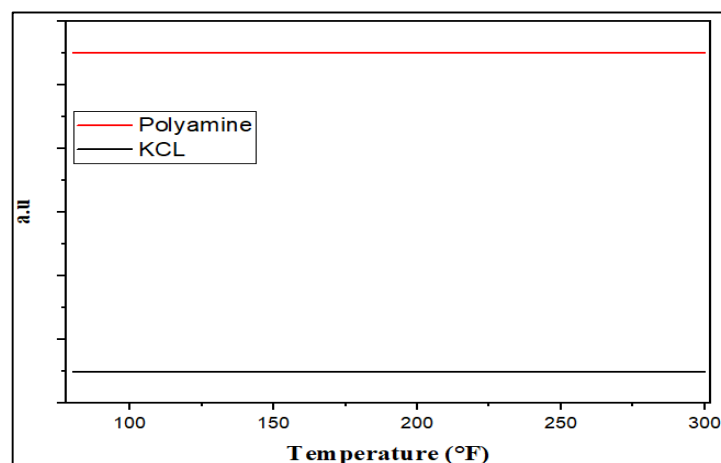


Figure 8. Mud cake of KCL and Polyamine.

4. Conclusion

The following conclusions can be drawn based on the findings of the research data:

1. When the composition of polymeric KCl sludge and polyamine is compared, the physical properties of polymeric KCl sludge are better than polyamine because, on the one hand, KCl is a polymer. However, if you want to use a more environmentally friendly mud, polyamine can be used.
2. The mud weight results for the KCl polymer mud composition at temperatures of 80°F, 250°F, and 300°F were 9.3 ppg, 9.1 ppg, and 9 ppg, respectively. The funnel viscosity was 40 sec/qt, 36 sec/qt,

and 34 sec/qt. Plastic viscosities of 20 cp, 17 cp, and 15 cp. Yield points of 24 lbs/100 ft², 19 lbs/100 ft², and 17 lbs/100 ft². Gel strength 10 seconds of 16 lbs/100 ft², 11 lbs/100 ft², and 8 lbs/100 ft². Gel strength after 10 minutes was 26 lbs/100 ft², 20 lbs/100 ft², and 16 lbs/100 ft². The slick rates were 4.8 cc, 6 cc, and 6.6 cc. The mud cake remained at 1 mm, and the pH remained at 9.

3. For mud weight, the results for polyamine mud composition at 80°F, 250 °F, and 300 °F were 9.2 ppg, 8.9 ppg, and 8.8 ppg, respectively. The funnel viscosity was 26 sec/qt, 20 sec/qt, and 17 sec/qt, respectively. 14 cp, 10 cp, and 8 cp plastic viscosity. Yield points of 17 lbs/100 ft², 12 lbs/100 ft², and 10 lbs/100 ft² are available. Where the yield point must be greater than the plastic viscosity in order for the mud to lift the cutting to the surface. 10 seconds of gel strength of 7 lbs/100 ft², 5 lbs/100 ft², and 3 lbs/100 ft². 10 minutes of gel strength of 14 lbs/100 ft², 10 lbs/100 ft², and 6 lbs/100 ft².

References

- [1] E. S. Engineering, "KCl COLLECTION DURING POTASH FLOTATION," no. March, 2020.
- [2] N. L. Miranti, S. S. Moersidik, C. R. Priadi, and P. Wahyudi, "Analisa Water Based Mud dengan Aditif Barit dan KCl Berdasarkan Analisa Toksisitas: Pengujian TCLP dan LC50-96 Jam," *Lembaran Publ. Miny. dan gas bumi*, vol. 48, no. 3, pp. 161–170, 2014.
- [3] P. Wijayanti, B. Satiyawira, A. Prima, A. Ristawati, and F. Sciorra, "Determination of Suitable KCl Polymer Mud Properties for POK Field," *Earth Energy Sci. Eng. Technol.*, vol. 4, no. 1, 2021.
- [4] Z. Zakky, B. Satiyawira, and S. Samsol, "Studi Laboratorium Pemilihan Additif Penstabil Shale Di Dalam Sistem Lumpur Kcl-Polimer Pada Temperatur Tinggi," *J. Mech. Eng. Mechatronics*, vol. 3, no. 1, p. 50, 2019.
- [5] B. Satiyawira, "Pengaruh Temperatur Terhadap Sifat Fisik Sistem Low Solid Mud Dengan Penambahan Aditif Biopolimer Dan Bentonite Extender," *PETROJurnal Ilm. Tek. Perminyakan*, vol. 7, no. 4, pp. 144–151, 2019.
- [6] D. A. Setyanto, R. Sudibjo, and A. Hamid, "Field Case: Application of Polyamine Based Mud System to Drill Kintom Formation in Sulawesi and Comparison to Conventional KCl-Polymer Mud System," *Earth Energy Sci. Eng. Technol.*, vol. 1, no. 2, 2018.
- [7] M. Mahmoud, A. Mady, A. S. Dahab, and A. Aftab, "Al₂O₃ and CuO nanoparticles as promising additives to improve the properties of KCl-polymer mud: An experimental investigation," *Can. J. Chem. Eng.*, vol. 100, no. 6, pp. 1384–1397, 2022.
- [8] J. A. Kwaw and E. Broni-bediako, "Effect of Salinity (KCl) on Rheological Properties and Rate of Penetration of Treated Bentonite and Ca 2 + Based Polymer Drilling Mud," no. March, pp. 1–8, 2023.
- [9] R. Husla, K. L. Pearlo, P. Studi, T. Perminyakan, F. Teknologi, and U. Trisakti, "PETRO : JURNAL ILMIAH TEKNIK PERMINYAKAN STUDI LABORATORIUM PENGARUH SISTEM BENTONITE PREHIDRASI TERHADAP MUD WEIGHT , VISKOSITAS , DAN PLASTIC VISCOSITY PADA TEMPERATUR 80 ° F , 250 ° F , DAN 300 ° F Abstrak," vol. 12, no. 1, pp. 12–26, 2023.
- [10] M. Beg, P. Singh, S. Sharma, and U. Ojha, "Shale inhibition by low-molecular-weight cationic polymer in water-based mud," *J. Pet. Explor. Prod. Technol.*, vol. 9, no. 3, pp. 1995–2007, 2019.
- [11] S. Kasmungin and A. Hamid, "Menstabilkan Shale Pada Sistem Lumpur Kcl Polimer Pada Temperatur Tinggi," *Semin. Nasioanal*, pp. 219–224, 2018.
- [12] W. Zhang *et al.*, "Understanding the evolution of stratified extracellular polymeric substances in full-scale activated sludges in relation to dewaterability," *RSC Adv.*, vol. 5, no. 2, pp. 1282–1294, 2015.
- [13] S. Azzahra, L. Samura, A. Nugrahanti, and R. Kartini, "The Effect of Corn Starch Concentration and Temperature on Filtration Loss and Mud Cake of the KCl-Polymer Mud System (Pengaruh Konsentrasi dan Suhu Tepung Jagung terhadap Kehilangan Filtrasi dan Kue Lumpur

- Sistem Lumpur Polimer KCl),” vol. **6**, no. 2, pp. 2–6, 2023.
- [14] ⁴ A. Hamza, M. Shamlooh, I. A. Hussein, M. Nasser, and S. Salehi, “Polymeric formulations used for loss circulation materials and wellbore strengthening applications in oil and gas wells: A review,” *J. Pet. Sci. Eng.*, vol. **180**, no. February, pp. 197–214, 2019.
- [15] ¹³ G. Wang and H. Du, “Rheological properties of KCL/polymer type drilling fluids containing particulate loss prevention material,” *Appl. Rheol.*, vol. **28**, no. 3, pp. 1–6, 2018.
- [16] A. Torsvik *et al.*, ¹¹ “Rheological comparison of bentonite based and KCl/polymer based drilling fluids,” *Annu. Trans. Nord. Rheol. Soc.*, vol. **22**, no. September 2014, pp. 219–224, 2014.
- [17] H. N. Dike, A. Dosunmu, O. Akaranta, and ; Kinigoma, ¹⁸ “Effect of Cashew Nut Shell Liquid Esters on KCL/Polymer/Glycol Drilling Fluid Flow Property,” vol. **2**, no. 3, 2019.

● 18% Overall Similarity

Top sources found in the following databases:

- 14% Internet database
- 9% Publications database
- Crossref database
- Crossref Posted Content database
- 10% Submitted Works database

TOP SOURCES

The sources with the highest number of matches within the submission. Overlapping sources will not be displayed.

1	e-journal.president.ac.id Internet	2%
2	eprints.undip.ac.id Internet	2%
3	Texas A&M University, College Station on 2023-02-25 Submitted works	1%
4	qspace.qu.edu.qa Internet	1%
5	Azeem Rana, Mobeen Murtaza, Tawfik A. Saleh, Muhammad Shahzad ... Crossref	<1%
6	rsisinternational.org Internet	<1%
7	Mukarram Beg, Pranav Kumar, Pratham Choudhary, Shivanjali Sharma.... Crossref	<1%
8	UNESCO-IHE Institute for Water Education on 2021-10-20 Submitted works	<1%

9	ptma.onesearch.id	Internet	<1%
10	trijurnal.trisakti.ac.id	Internet	<1%
11	Firoza Sheikh, Bhairab Jyoti Gogoi. "Extraction of biodiesel from pomel...	Crossref	<1%
12	Universiti Malaysia Pahang on 2018-05-14	Submitted works	<1%
13	Ting Huang, Lina Cao, Junjun Cai, Peng Xu. "Experimental investigation...	Crossref	<1%
14	Universiti Teknologi Malaysia on 2023-03-19	Submitted works	<1%
15	pt.scribd.com	Internet	<1%
16	scientific.net	Internet	<1%
17	British University in Egypt on 2021-01-04	Submitted works	<1%
18	patents.google.com	Internet	<1%
19	library.gunadarma.ac.id	Internet	<1%
20	repositorio.uan.edu.co	Internet	<1%

- | | | |
|-------|--|-----|
| 21 | Benny H. Armadi, Chalilullah Rangkuti, M. D. Fauzi, R. Permatasari. "Th... | <1% |
| <hr/> | | |
| 22 | garuda.kemdikbud.go.id | <1% |
| <hr/> | | |
| 23 | magister-perminyakan.ftke.trisakti.ac.id | <1% |
| <hr/> | | |
| 24 | Dhrubajyoti Neog. "Sensitivity analysis for enhancing crude oil recover... | <1% |
| <hr/> | | |
| 25 | Putri Humairah Monashofian Putra, Badrul Mohamed Jan, Mohamad F... | <1% |
| <hr/> | | |
| 26 | Tawfik A. Saleh. "Experimental and analytical methods for testing inhib... | <1% |
| <hr/> | | |
| 27 | Technische Universität Clausthal on 2018-01-11 | <1% |
| <hr/> | | |
| 28 | Jun Wang, Xianhui Cao, Junjun Chen, Jincheng Zou, Weike Liu, Rong H... | <1% |
| <hr/> | | |
| 29 | R Setiati, S Siregar, T Marhaendrajana, D Wahyuningrum, A Listyani. "C... | <1% |
| <hr/> | | |
| 30 | Universitas Indonesia on 2018-07-29 | <1% |
| <hr/> | | |
| 31 | Mohammed Al-Rubaii, Mohammed Al-Shargabi, Dhafer Al-Shehri. "Hol... | <1% |

● Excluded from Similarity Report

- Manually excluded sources
- Manually excluded text blocks

EXCLUDED SOURCES

Lisa Samura, Cahaya Rosyidan, Mustamina Maulani, Suryo Prakoso et al. "Phy... 93%

Crossref

Mustamina Maulani, David Michael, Asri Nugrahanti, Cahaya Rosyidan, Lisa S... 10%

Crossref

R Yulianti, P N Hartami, R Aryanto, M K Herdyanti, Suliestyah, D L Pattiruhu. "... 10%

Crossref

Purnomosidi, W Igor, I Erdila. "Comparison of methanol and ethylene glycol ef... 9%

Crossref

P Pauhesti, L Satiawati, G Yasmaniar, A K Saputra, A Kalasnikova. "Laboratory... 9%

Crossref

Rahardian Dwitya, Awang Hendrianto Pratomo, Tedy Agung Cahyadi, Arif Rian... 9%

Crossref

E Muryani, Sajidan, M S Budiastuti, Pranoto. "The capacity of Plectranthus sp... 9%

Crossref

M G Rachman, O Kurniawan, A Nugraha. "Formulating flood mitigation throug... 9%

Crossref

Fadliah, I Raya, P Taba, M Burhanuddinnur, M Gaffar, W Dahani, C Palit, T W P... 9%

Crossref

D F Yudiantoro, Afrilita, S Pambudi, A Subandrio et al. "Geotourism of Telomo... 9%

Crossref

Albert K. Suparmanto, Rini Setiati, M. Taufiq Fathaddin, Suryo Prakoso, Dwi At... Crossref	9%
Abi Setyananda, Pantjanita Novi Hartami, Yuga Maulana, Edy Jamal Tuheteru,... Crossref	9%
repository.effatuniversity.edu.sa Internet	7%
researchgate.net Internet	7%
repository.petra.ac.id Internet	7%
e-journal.trisakti.ac.id Internet	7%
repository.unair.ac.id Internet	6%
iris.unimore.it Internet	6%
api.repository.poltekesos.ac.id Internet	6%
Rizka Amelia Dwi Safira, Nurwatik Nurwatik, Teguh Hariyanto. "Identifying Pot... Crossref	6%
R Setiati, S Siregar, D Wahyuningrum, A Rinanti. "Synthesis method of chitin b... Crossref	6%
N. K. Diem, P. K. Diem, P. M. Thien, N. K. Downes. "Monitoring Urban Heat Isla... Crossref	6%

Zhaodan Fei, Rui Zhang, Hui Xu, Tong Mu. "Investigation of the groove effect ... Crossref	6%
T A Ngo, L See, S J Leisz, N B Tran, T H V Dinh, T H Nguyen. "Spatial assessm... Crossref	6%
Puspitasari, A M Kiloos, Y Saleh, N Q Hayati, Nurmalinda, D Sugandi, D K S Sw... Crossref	6%
Hang Yin, Chaoying Feng. "A Method of Security Emergency Plan Decision Ma... Crossref	6%
repository.unja.ac.id Internet	6%
Rutgers University, New Brunswick on 2023-02-12 Submitted works	6%
Nguyen T Binh, Dinh H Duyen, Doan T Thuy. "Application of GIS in land unit m... Crossref	6%
eprints.unram.ac.id Internet	6%
Rama Karn, Nishita Ojha, Sadiqa Abbas, Sonal Bhugra. "A review on heavy me... Crossref	6%
Rahajeng Pradeti, Yuning Widiarti, Indri Santiasih. "The effect of safety climat... Crossref	6%
G G Alexandrov, A S Ginzburg. "Current trends of climatically driven minimal h... Crossref	6%
repository.uhamka.ac.id Internet	6%

De La Salle Santiago Zobel School on 2021-07-30	3%
Submitted works	
trijurnal.lemlit.trisakti.ac.id	3%
Internet	
Fakultas Teknologi Kebumian dan Energi Universitas Trisakti on 2021-06-09	3%
Submitted works	
e-journal.trisakti.ac.id	3%
Internet	
trijurnal.trisakti.ac.id	3%
Internet	
neliti.com	3%
Internet	
Rini Setiati, Septoratio Siregar, Taufan Marhaendrajana, Deana Wahyuningru...	2%
Crossref	
U. Sumotarto, F. Hendrasto, M. Meirawati, I. Azzam. "Geology of Arjosari geot...	2%
Crossref	
Widya Yanti, Bayu Satyawira, Liani Anisara, Puri Wijayanti, Pauhesti Pauhesti,...	2%
Crossref	
e3s-conferences.org	2%
Internet	
trijurnal.lemlit.trisakti.ac.id	2%
Internet	
pertambangan.fst.uinjkt.ac.id	2%
Internet	

karyailmiah.trisakti.ac.id

Internet

2%

California State University, Fresno on 2024-05-13

Submitted works

2%

repository.library.noaa.gov

Internet

1%

EXCLUDED TEXT BLOCKS

sludge composition and polyamine at different

Lisa Samura, Cahaya Rosyidan, Mustamina Maulani, Suryo Prakoso et al. "Physical property comparison of ...

workersMichelle Tigchelaar, David S Battisti andJune T Spector

Lisa Samura, Cahaya Rosyidan, Mustamina Maulani, Suryo Prakoso et al. "Physical property comparison of ...

To cite this article

E Muryani, Sajidan, M S Budiastuti, Pranoto. "The capacity of Plectranthus sp. to perform phytoremediation...

IOP Conference Series: Earth andEnvironmental SciencePAPER • OPEN ACCESS

businessdocbox.com

Work adaptations insufficient to addressgrowing heat risk for U.S. agricultural

biblio.vub.ac.be

Quantifying the impact of changing thethreshold of New York City heatemergency ...

www.iccic.org.il

illnessesTarik Benmarhnia, Lara Schwarz, AmrutaNori-Sarma et al.This content wa...

S F Farizi, N Umamah, Sumardi, Marjono, R A Surya. "Schoology effectivity as history learning environment ...